

PHOTOMETRICS REPORT

OVATION

R

Ê

V

E

E - 3



Table of Contents

1. Testing Process	1
2. Photometric Reports	2
5° Lens – Full Power	2
Report Summary	2
Overall Measurement	2
Beam Details	3
Polar Diagrams	4
10° Lens – Full Power	5
Report Summary	5
Overall Measurement	5
Beam Details	6
Polar Diagrams	7
14° Lens – Full Power	8
Report Summary	8
Overall Measurement	8
Beam Details	9
Polar Diagrams	10
19° Lens – Full Power	11
Report Summary	11
Overall Measurement	11
Beam Details	12
Polar Diagrams	13
26° Lens – Full Power	14
Report Summary	14
Overall Measurement	14
Beam Details	15
Polar Diagrams	16

36° Lens – Full Power	17
Report Summary	17
Overall Measurement	17
Beam Details	18
Polar Diagrams	19
50° Lens – Full Power	20
Report Summary	20
Overall Measurement	20
Beam Details	21
Polar Diagrams	22
15–30% Zoom Lens – 15°– Full Power	23
Report Summary	23
Overall Measurement	23
Beam Details	24
Polar Diagrams	25
15–30% Zoom Lens – 30°– Full Power	26
Report Summary	26
Overall Measurement	26
Beam Details	27
Polar Diagrams	28
25–50% Zoom Lens – 25°– Full Power	29
Report Summary	29
Overall Measurement	29
Beam Details	30
Polar Diagrams	31
25–50% Zoom Lens – 50°– Full Power	32
Report Summary	32
Overall Measurement	32
Beam Details	33
Polar Diagrams	34

3. Chromaticity Reports 35

 3200K – 26° Lens – Full Power 35

 Report Summary 35

 Chromaticity 36

 TM-30-18 Details 37

 4000K – 26° Lens – Full Power 38

 Report Summary 38

 Chromaticity 39

 TM-30-18 Details 40

 5600K – 26° Lens – Full Power 41

 Report Summary 41

 Chromaticity 42

 TM-30-18 Details 43

4. Contact Us 44

Testing Process

Total Illuminance Measurements

Illuminance is measured using the Viso Systems LabSpion®, which takes multiple measurements across a light beam to calculate the total delivered lumens, beam, and field of a product. These values can be described as the empirical output of the product as it projects from the lens or lenses. All photometric data contained in this report are obtained from the actual illuminance of the tested Chauvet light source and are never theoretical values derived from calculations.

Testing Lab Equipment and Process

The Chauvet headquarters in Sunrise, Florida has a climate- and light-controlled photometric testing laboratory where Chauvet products are analyzed and photometric data are measured using the Viso Systems LabSpion® light measurement solution.

This system includes a spectrometer sensor, which measures the precise light and color output of the fixture, and a two-axis goniometer, which rotates the product to allow for multi-angle and multi-directional measurement. The Viso Light Inspector software then collects and summarizes the data. From the data gathered, the software can also measure the beam and field angles, accurate color temperature, color quality, and illuminance at multiple distances. The custom-built, Chauvet-specific template presents this information in the photometric and chromaticity reports that follow.

IES (Illuminating Engineering Society) files, an industry-standard file format, are also generated from each test for easy distribution of photometric data.

Several light meters are also used for specific products or to recheck for precision. Accuracy is verified using one or more of the devices listed below:

- Sekonic SpectroMaster C-700-U
- EXTECH HD450 Datalogging Heavy Duty Light Meter
- Asensetek Essence Lighting Passport

To ensure accurate measurements in every photometric or chromaticity test, Chauvet routinely calibrates the LabSpion® system every six months as recommended by Viso Systems.

Photometric Report

Ovation Rêve E-3: 5° Lens - Full Power

Report Summary

Output

Total Lumens: 5076 lm
Peak Intensity: 796399 cd
Illuminance @ 5m: 31856 lux
Fixture Efficacy: 4 lm/W

Optical

Horizontal Beam Angle (50%): 4.6°
Vertical Beam Angle (50%): 4.6°
Horizontal Field Angle (10%): 5.6°
Vertical Field Angle (10%): 5.6°
Horizontal Cutoff Angle (3%): 6°
Vertical Cutoff Angle (3%): 6°




Conditions

AC Supply: 117 V, 60 Hz
Power: 1340.38 W
Current: 11.5 A
Power Factor: 0.97



This data sheet conforms to American National Standard E1.9 – 2007 (R2017). All data was measured and calculated by a Viso Systems LabSpion Goniometer at the Chauvet PD Optics Laboratory in Sunrise, FL on 3/11/2021 to LM-63-2002 Standards.


Overall Measurement

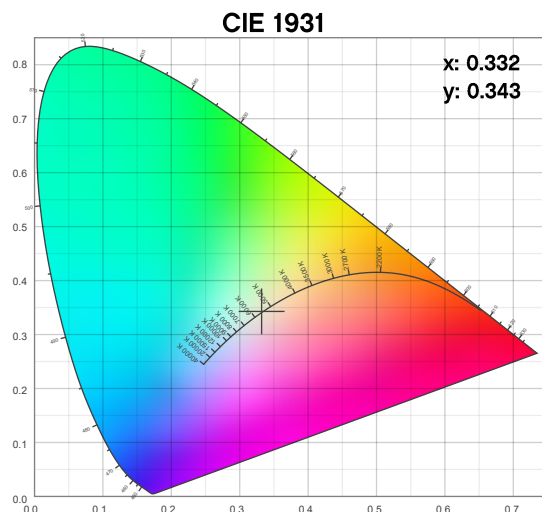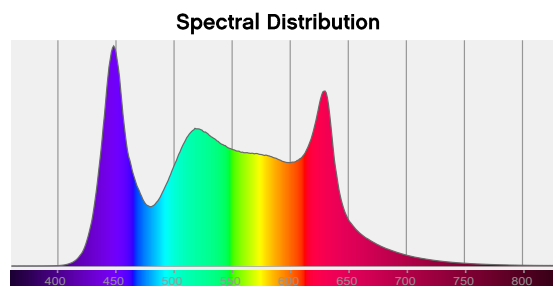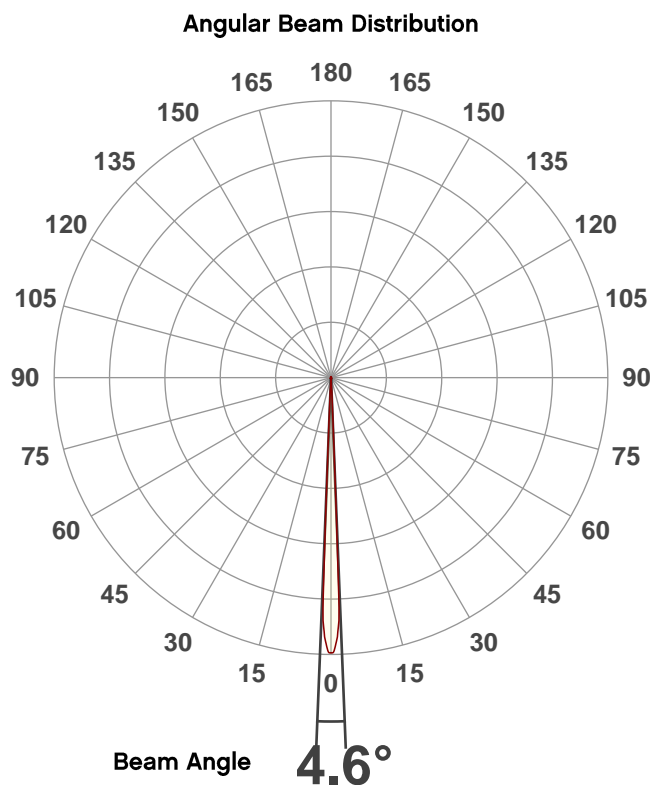

Photometric Report

Ovation Rêve E-3: 5° Lens - Full Power

Beam Details

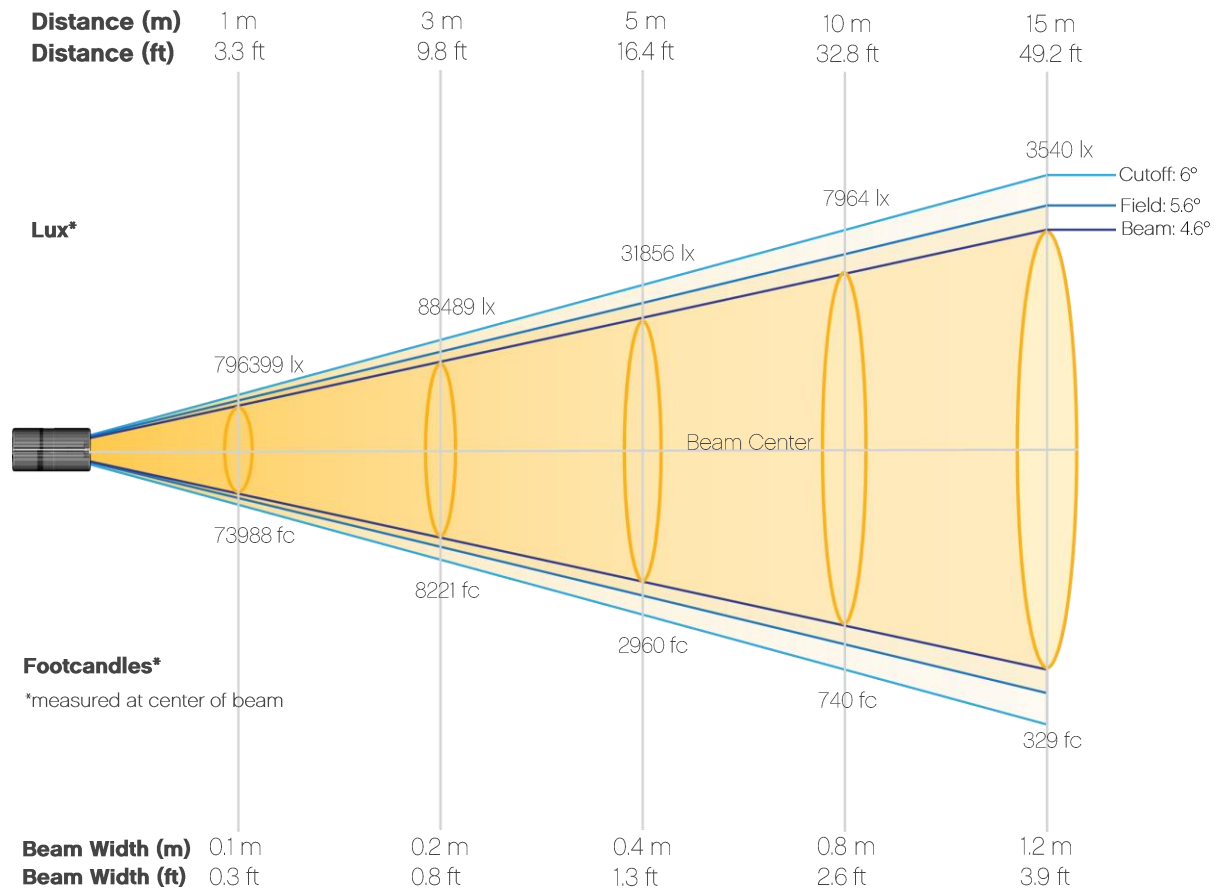


Beam Illuminances from 1-20m (3.3-65.6ft)

Distance	1m	2m	3m	4m	5m	6m	7m	8m	9m	10m
Lux	796399	199100	88489	49775	31856	22122	16253	12444	9832	7964
Distance	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
Lux	6582	5531	4712	4063	3540	3111	2756	2458	2206	1991
Distance	3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft
FC	73988	18497	8221	4624	2960	2055	1510	1156	913	740
Distance	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
FC	611	514	438	377	329	289	256	228	205	185

Photometric Report

Ovation Rêve E-3: 5° Lens - Full Power


Candela Plot

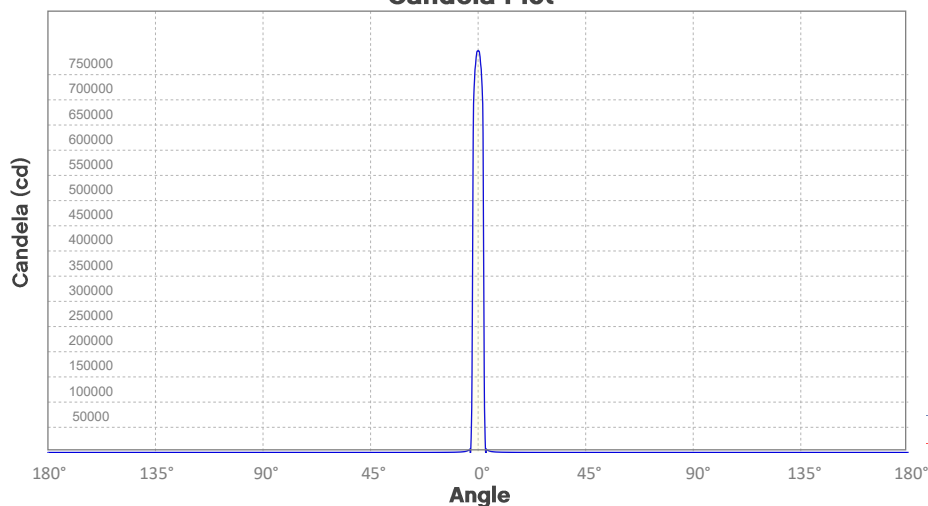

Beam Angle (50%): 4.6°
Field Angle (10%): 5.6°
Cutoff Angle (3%): 6°

— Horizontal Distribution
— Vertical Distribution


Polar Diagrams

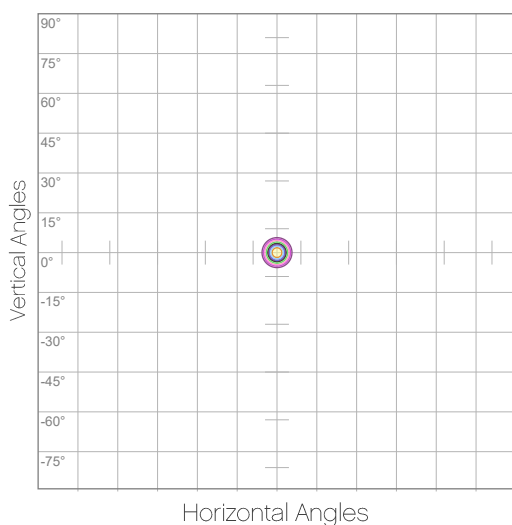

iso-candela Diagram

10%	79640 cd
20%	159280 cd
30%	238920 cd
40%	318560 cd
50%	398200 cd
60%	477839 cd
70%	557479 cd
80%	637119 cd
90%	716759 cd

Conditions:
Number of c-planes: 2
Candela at center: 796399 cd

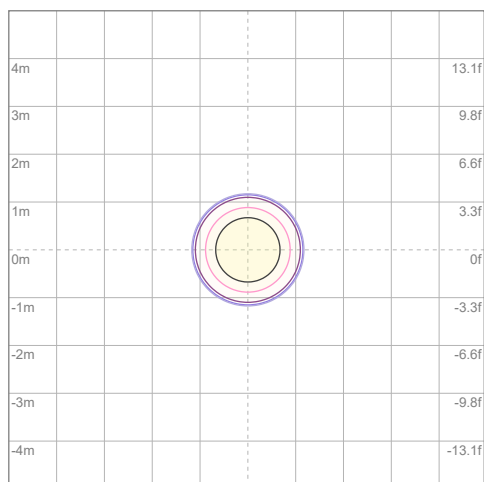

iso-illuminance Diagram

3%	239 lx
5%	398 lx
10%	796 lx
30%	2389 lx
50%	3982 lx

Conditions:
Number of c-planes: 2
Lux at center: 7964 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Mounting height: 10 meters / 33 feet

Photometric Report

Ovation Rêve E-3: 10° Lens - Full Power

Report Summary

Output

Total Lumens: 11250 lm
Peak Intensity: 473106 cd
Illuminance @ 5m: 18924 lux
Fixture Efficacy: 55 lm/W

Optical

Horizontal Beam Angle (50%): 10°
Vertical Beam Angle (50%): 10°
Horizontal Field Angle (10%): 11.1°
Vertical Field Angle (10%): 11.1°
Horizontal Cutoff Angle (3%): 11.8°
Vertical Cutoff Angle (3%): 11.8°




Conditions

AC Supply: 120 V, 60 Hz
Power: 813.05 W
Current: 6.78 A
Power Factor: 0.25



This data sheet conforms to American National Standard E1.9 – 2007 (R2017). All data was measured and calculated by a Viso Systems LabSpion Goniometer at the Chauvet PD Optics Laboratory in Sunrise, FL on 3/1/2021 to LM-63-2002 Standards.


Overall Measurement

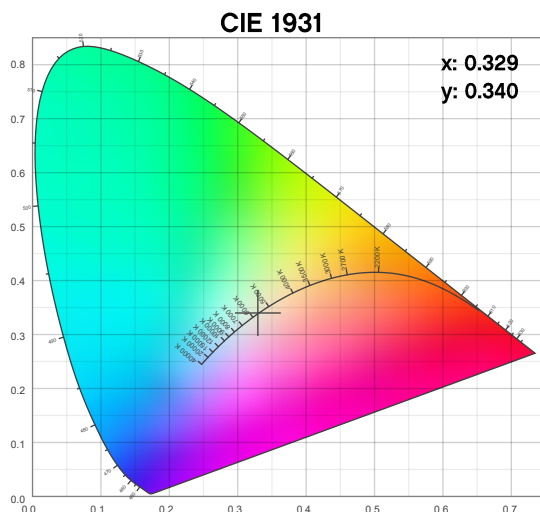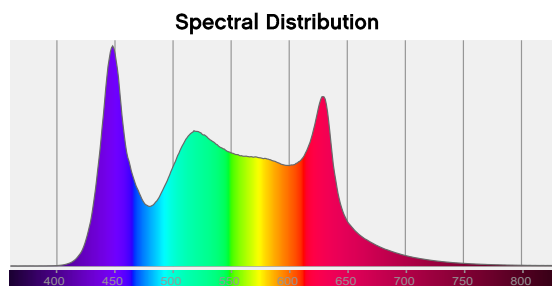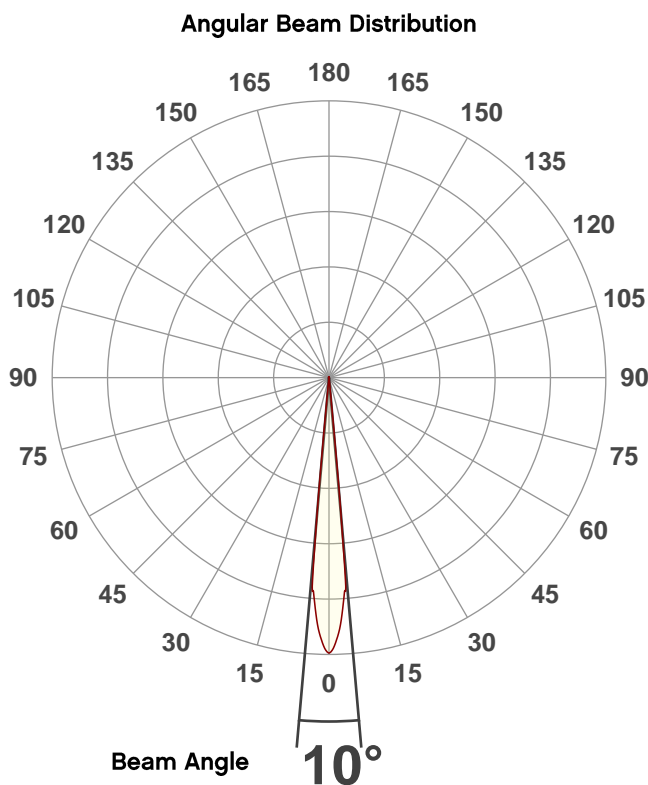

Photometric Report

Ovation Rêve E-3: 10° Lens - Full Power

Beam Details

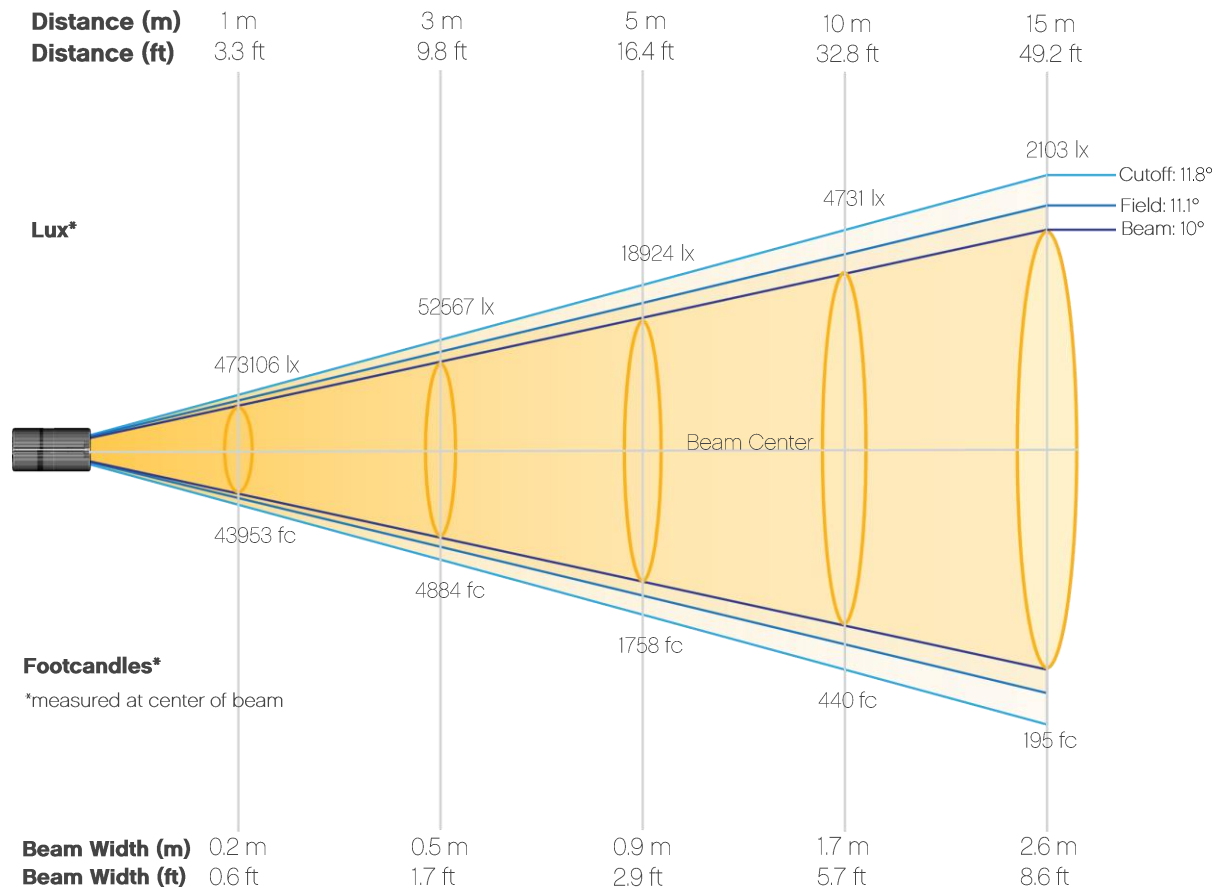


Beam Illuminances from 1-20m (3.3-65.6ft)

Distance	1m	2m	3m	4m	5m	6m	7m	8m	9m	10m
Lux	473106	118277	52567	29569	18924	13142	9655	7392	5841	4731
Distance	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
Lux	3910	3285	2799	2414	2103	1848	1637	1460	1311	1183
Distance	3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft
FC	43953	10988	4884	2747	1758	1221	897	687	543	440
Distance	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
FC	363	305	260	224	195	172	152	136	122	110


Photometric Report

Ovation Rêve E-3: 10° Lens - Full Power

Candela Plot

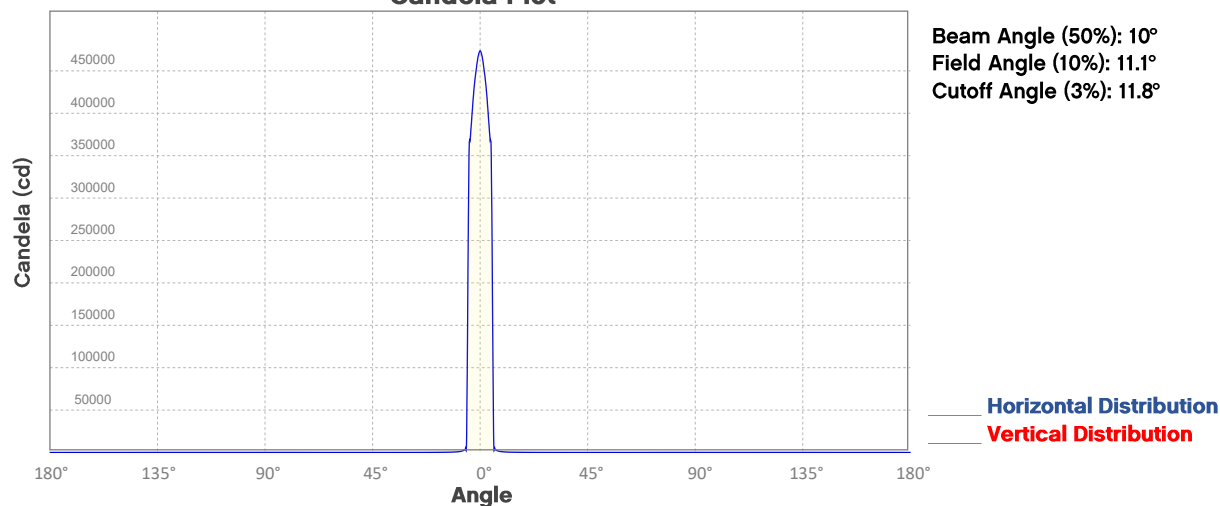


Polar Diagrams

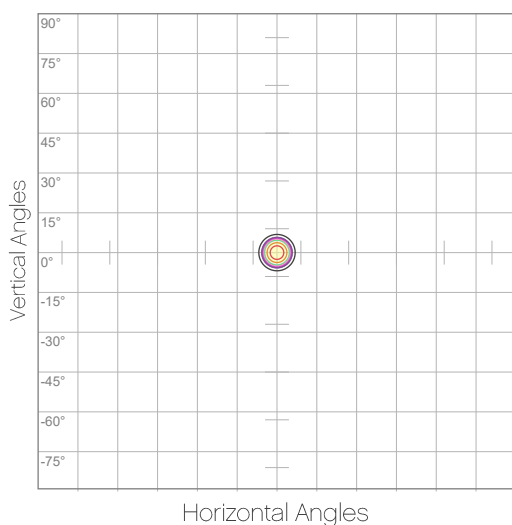

iso-candela Diagram

10%	47311 cd
20%	94621 cd
30%	141932 cd
40%	189243 cd
50%	236553 cd
60%	283864 cd
70%	331174 cd
80%	378485 cd
90%	425796 cd

Conditions:
Number of c-planes: 2
Candela at center: 473106 cd

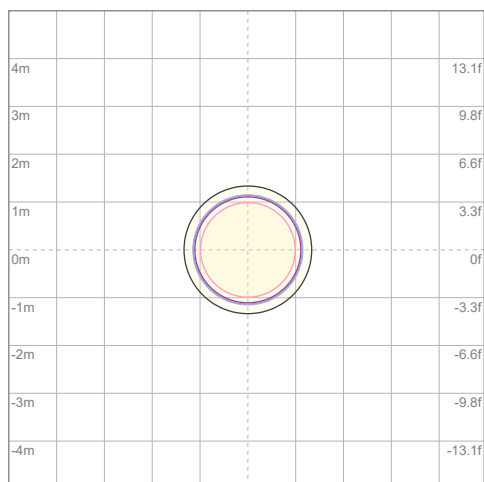

iso-illuminance Diagram

3%	142 lx
5%	237 lx
10%	473 lx
30%	1419 lx
50%	2366 lx

Conditions:
Number of c-planes: 2
Lux at center: 4731 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Mounting height: 10 meters / 33 feet

Photometric Report

Ovation Rêve E-3: 14° Lens - Full Power

Report Summary

Output

Total Lumens: 12179 lm
Peak Intensity: 232220 cd
Illuminance @ 5m: 9284 lux
Fixture Efficacy: 12 lm/W

Optical

Horizontal Beam Angle (50%): 14.8°
Vertical Beam Angle (50%): 14.8°
Horizontal Field Angle (10%): 16°
Vertical Field Angle (10%): 16°
Horizontal Cutoff Angle (3%): 17.6°
Vertical Cutoff Angle (3%): 17.6°




Conditions

AC Supply: 117 V, 60 Hz
Power: 1042.77 W
Current: 8.92 A
Power Factor: 1.0



This data sheet conforms to American National Standard E1.9 – 2007 (R2017). All data was measured and calculated by a Viso Systems LabSpion Goniometer at the Chauvet PD Optics Laboratory in Sunrise, FL on 2/26/2021 to LM-63-2002 Standards.


Overall Measurement

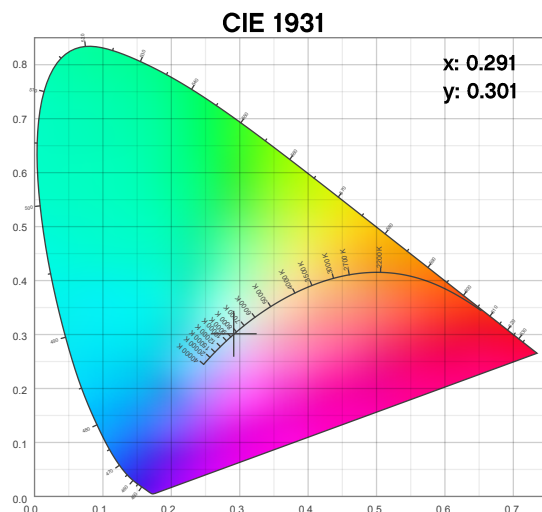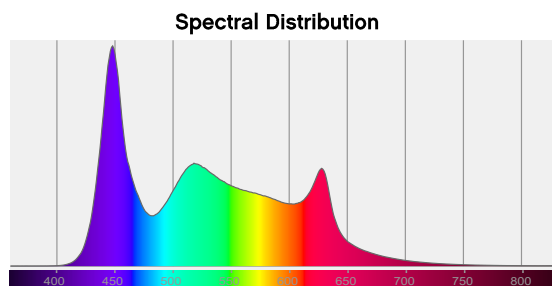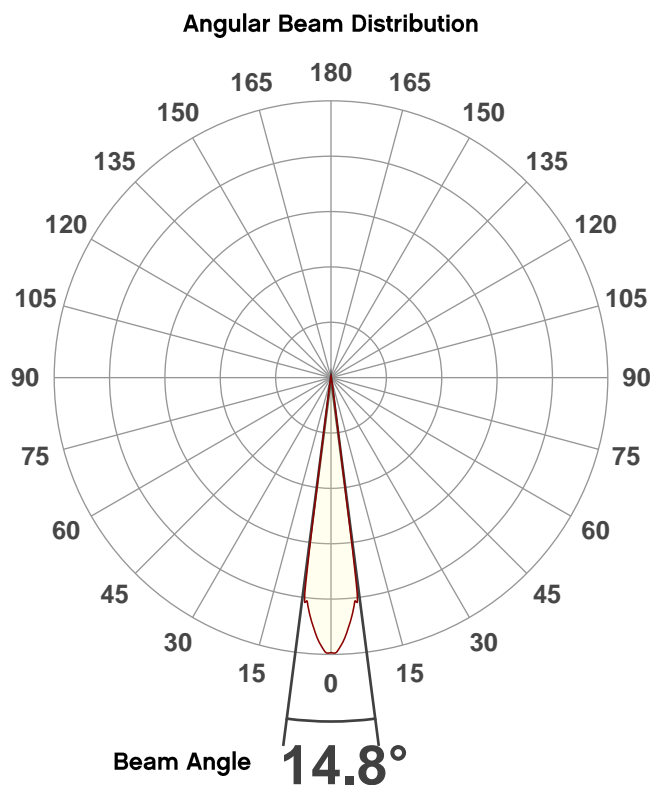

Photometric Report

Ovation Rêve E-3: 14° Lens - Full Power

Beam Details

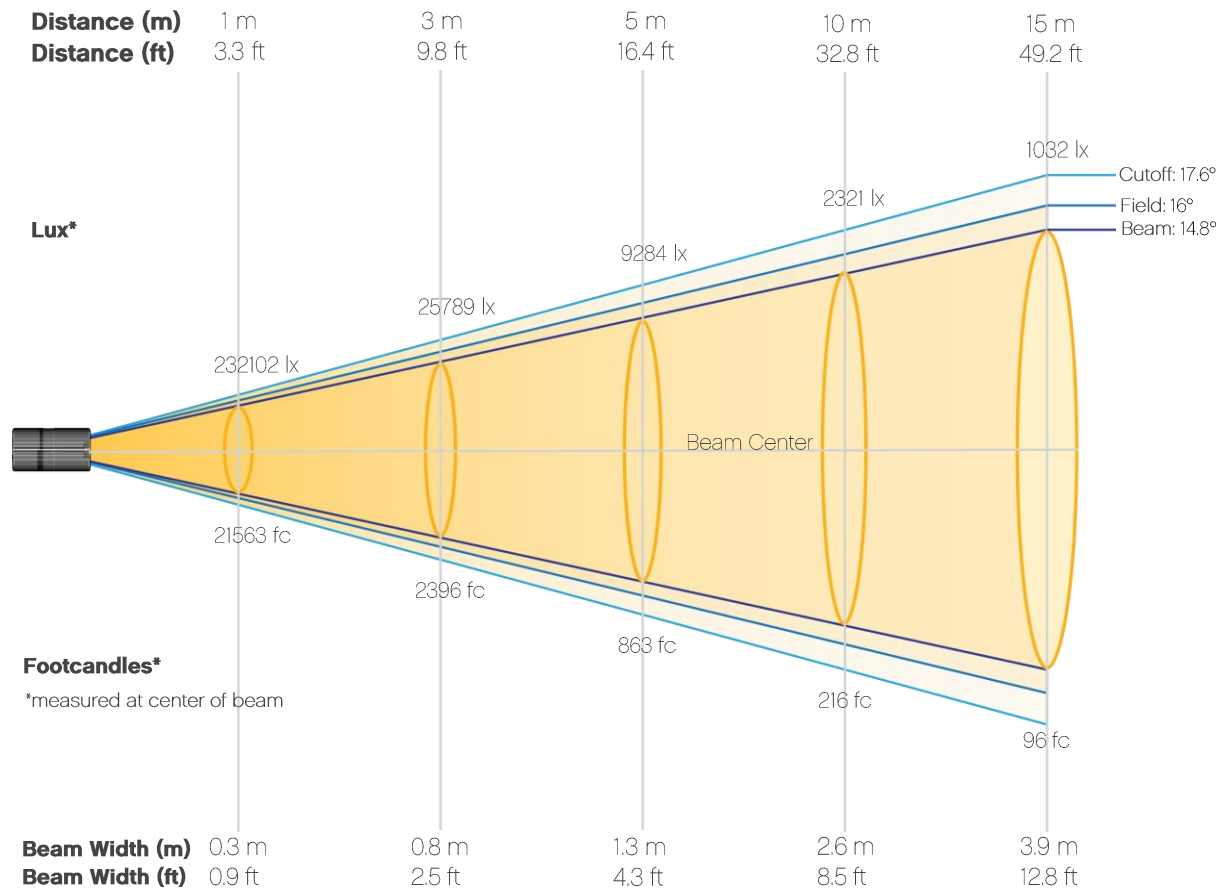


Beam Illuminances from 1-20m (3.3-65.6ft)

Distance	1m	2m	3m	4m	5m	6m	7m	8m	9m	10m
Lux	232102	58025	25789	14506	9284	6447	4737	3627	2865	2321
Distance	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
Lux	1918	1612	1373	1184	1032	907	803	716	643	580
Distance	3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft
FC	21563	5391	2396	1348	863	599	440	337	266	216
Distance	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
FC	178	150	128	110	96	84	75	67	60	54


Photometric Report

Ovation Rêve E-3: 14° Lens - Full Power

Candela Plot

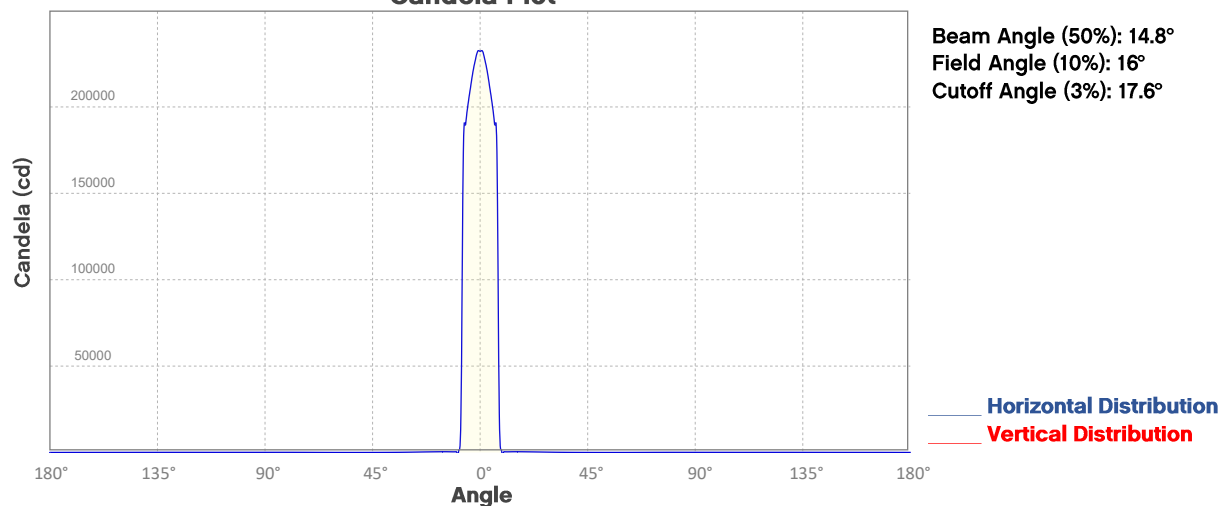


Polar Diagrams

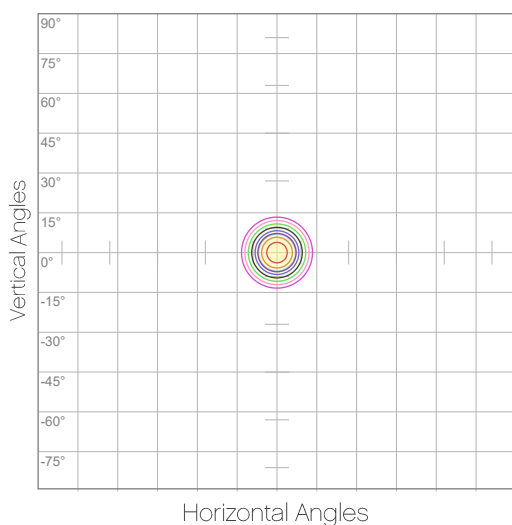

iso-candela Diagram

10%	23210 cd
20%	46420 cd
30%	69631 cd
40%	92841 cd
50%	116051 cd
60%	139261 cd
70%	162471 cd
80%	185681 cd
90%	208892 cd

Conditions:
Number of c-planes: 2
Candela at center: 232102 cd

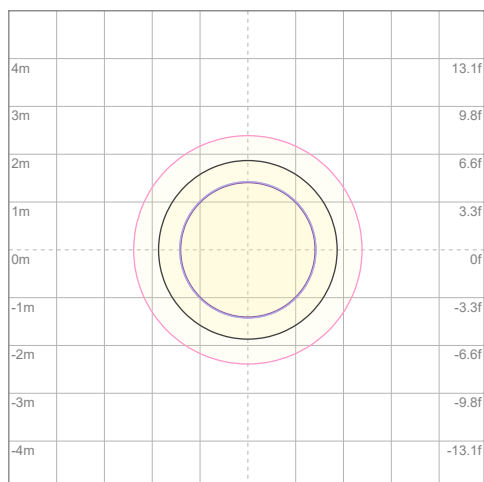

iso-illuminance Diagram

3%	69.6 lx
5%	116 lx
10%	232 lx
30%	696 lx
50%	1161 lx

Conditions:
Number of c-planes: 2
Lux at center: 2321 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Mounting height: 10 meters / 33 feet

Photometric Report

Ovation Rêve E-3: 1 ° Lens - Full Power

Report Summary

Output

Total Lumens: 12156 lm
Peak Intensity: 140878 cd
Illuminance @ 5m: 5635 lux
Fixture Efficacy: 32 lm/W

Optical

Horizontal Beam Angle (50%): 18.5°
Vertical Beam Angle (50%): 18.5°
Horizontal Field Angle (10%): 21.6°
Vertical Field Angle (10%): 21.6°
Horizontal Cutoff Angle (3%): 22.7°
Vertical Cutoff Angle (3%): 22.7°




Conditions

AC Supply: 116 V, 60 Hz
Power: 379.65 W
Current: 3.27 A
Power Factor: 1.0



This data sheet conforms to American National Standard E1.9 – 2007 (R2017). All data was measured and calculated by a Viso Systems LabSpion Goniometer at the Chauvet PD Optics Laboratory in Sunrise, FL on 3/11/2021 to LM-63-2002 Standards.


Overall Measurement

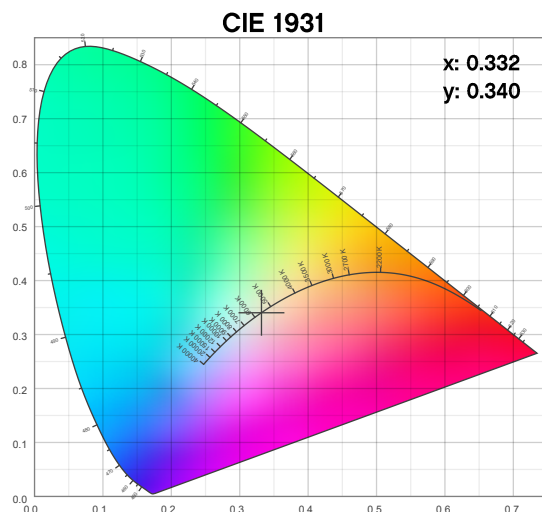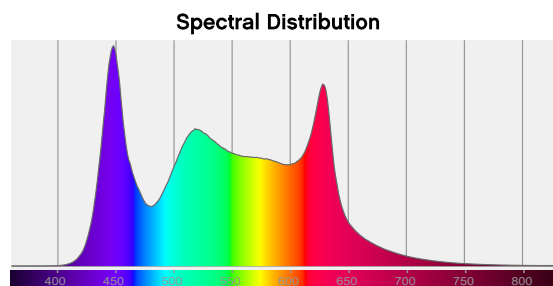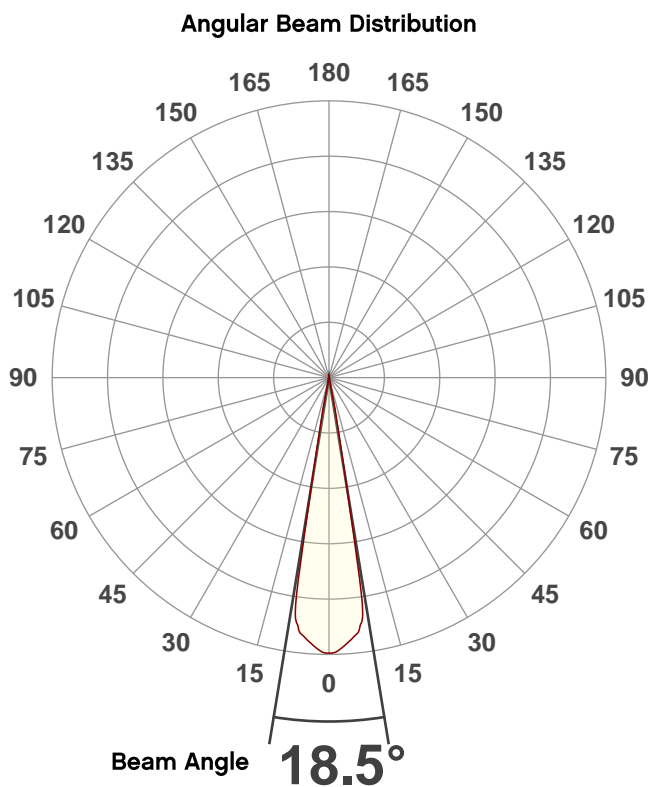

Photometric Report

Ovation Rêve E-3: 1 ° Lens - Full Power

Beam Details

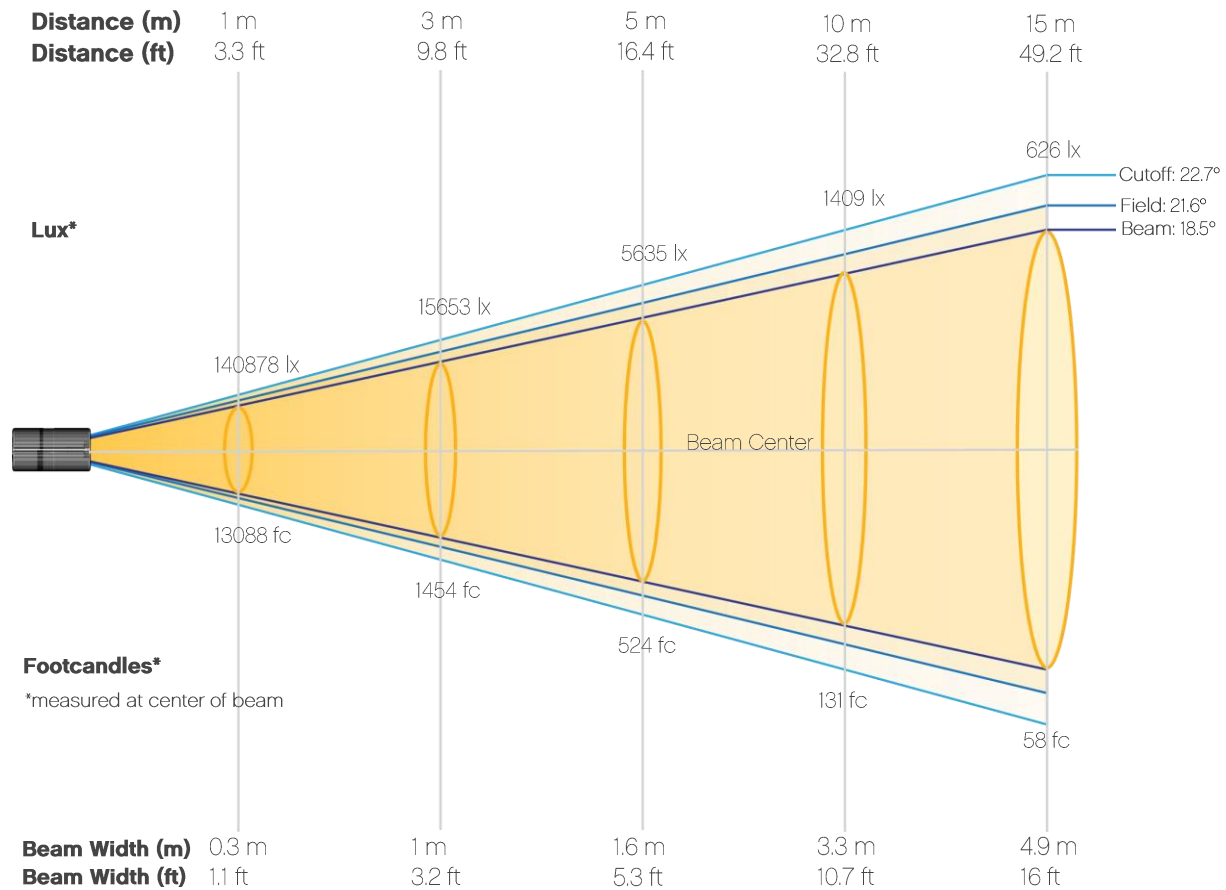


Beam Illuminances from 1-20m (3.3-65.6ft)

Distance	1m	2m	3m	4m	5m	6m	7m	8m	9m	10m
Lux	140878	35220	15653	8805	5635	3913	2875	2201	1739	1409
Distance	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
Lux	1164	978	834	719	626	550	487	435	390	352
Distance	3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft
FC	13088	3272	1454	818	524	364	267	205	162	131
Distance	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
FC	108	91	77	67	58	51	45	40	36	33


Photometric Report

Ovation Rêve E-3: 1 ° Lens - Full Power

Candela Plot

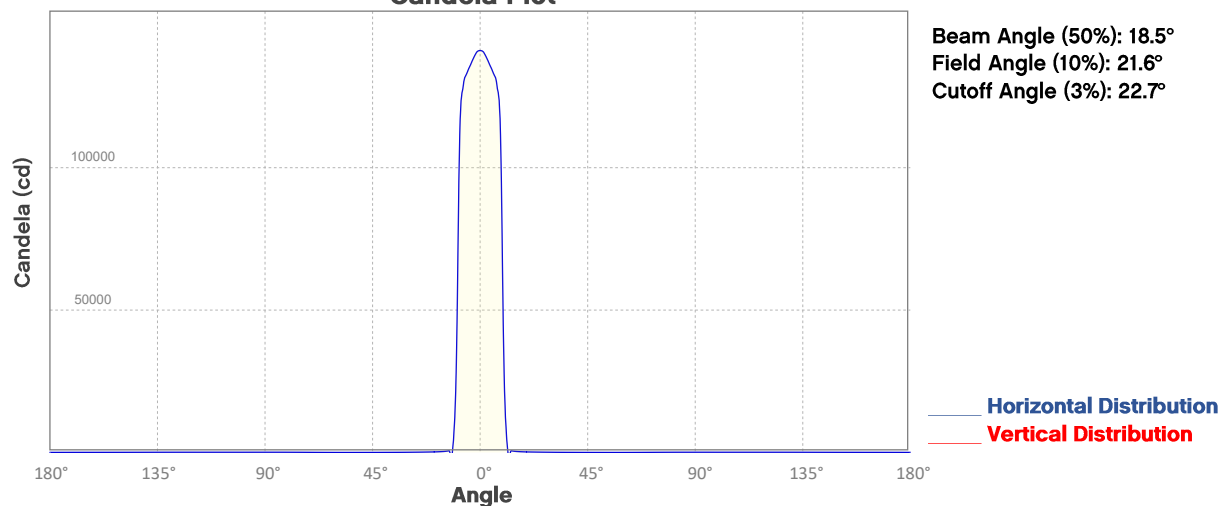


Polar Diagrams

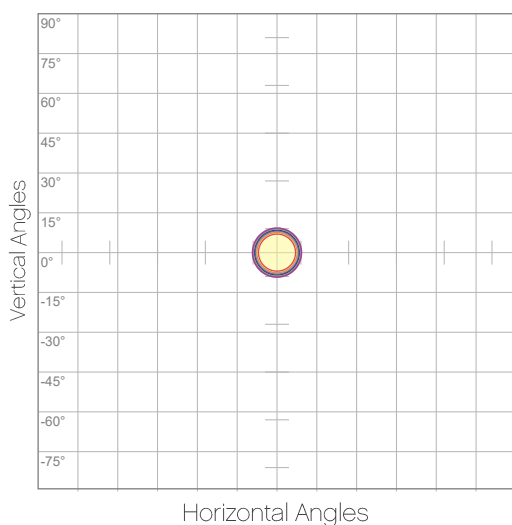

iso-candela Diagram

10%	14088 cd
20%	28176 cd
30%	42263 cd
40%	56351 cd
50%	70439 cd
60%	84527 cd
70%	98615 cd
80%	112703 cd
90%	126790 cd

Conditions:
Number of c-planes: 2
Candela at center: 140878 cd

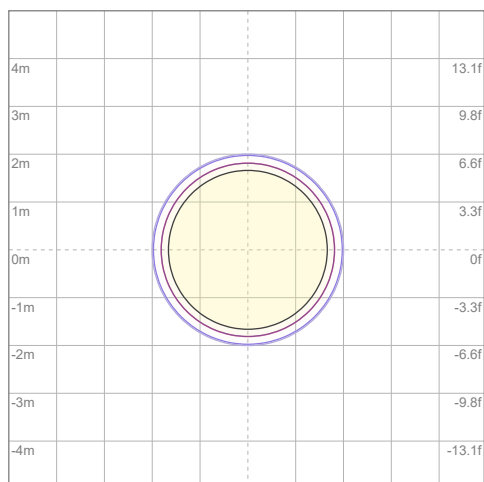

iso-illuminance Diagram

3%	42.3 lx
5%	70.4 lx
10%	141 lx
30%	423 lx
50%	704 lx

Conditions:
Number of c-planes: 2
Lux at center: 1409 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Mounting height: 10 meters / 33 feet

Photometric Report

Ovation Rêve E-3: 26° Lens - Full Power

Report Summary

Output

Total Lumens: 13300 lm
Peak Intensity: 84444 cd
Illuminance @ 5m: 3378 lux
Fixture Efficacy: 35 lm/W

Optical

Horizontal Beam Angle (50%): 26°
Vertical Beam Angle (50%): 26°
Horizontal Field Angle (10%): 29.6°
Vertical Field Angle (10%): 29.6°
Horizontal Cutoff Angle (3%): 30.3°
Vertical Cutoff Angle (3%): 30.3°




Conditions

AC Supply: 116 V, 60 Hz
Power: 379.38 W
Current: 3.26 A
Power Factor: 1.0



This data sheet conforms to American National Standard E1.9 – 2007 (R2017). All data was measured and calculated by a Viso Systems LabSpion Goniometer at the Chauvet PD Optics Laboratory in Sunrise, FL on 3/11/2021 to LM-63-2002 Standards.


Overall Measurement

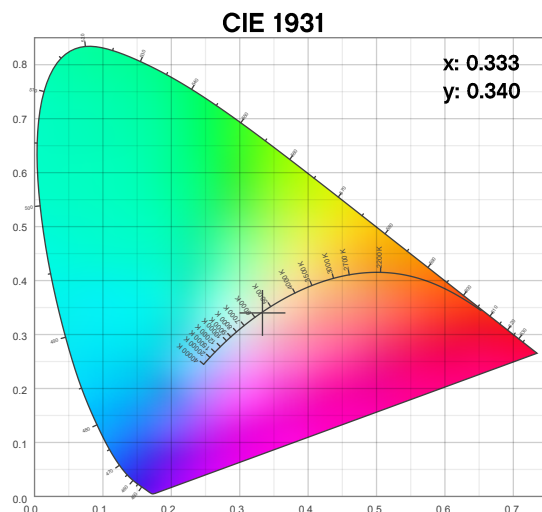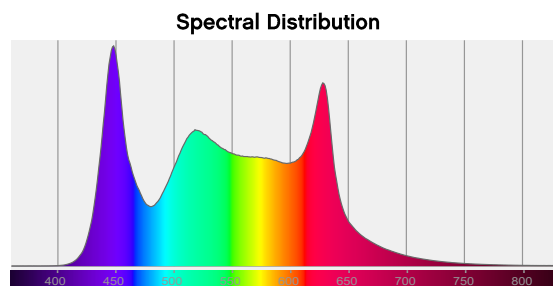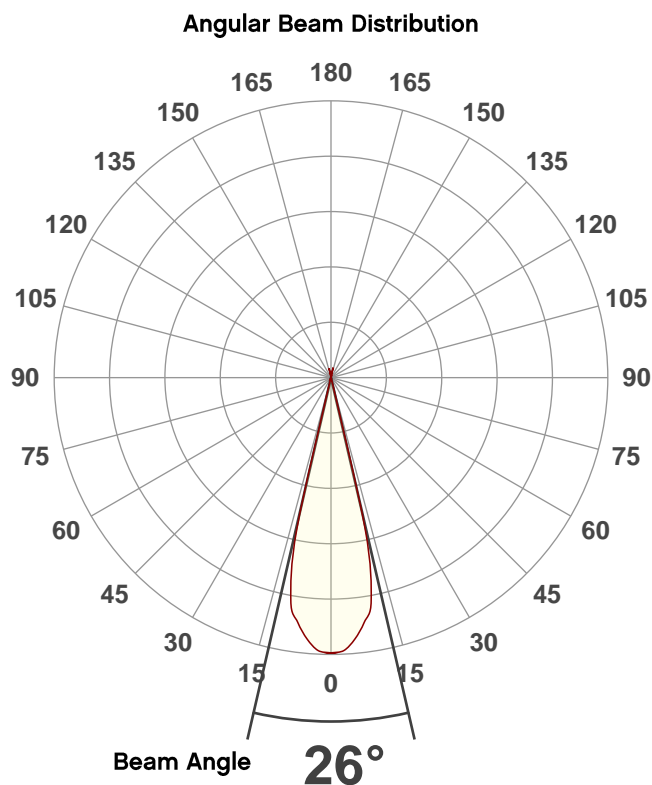

Photometric Report

Ovation Rêve E-3: 26° Lens - Full Power

Beam Details

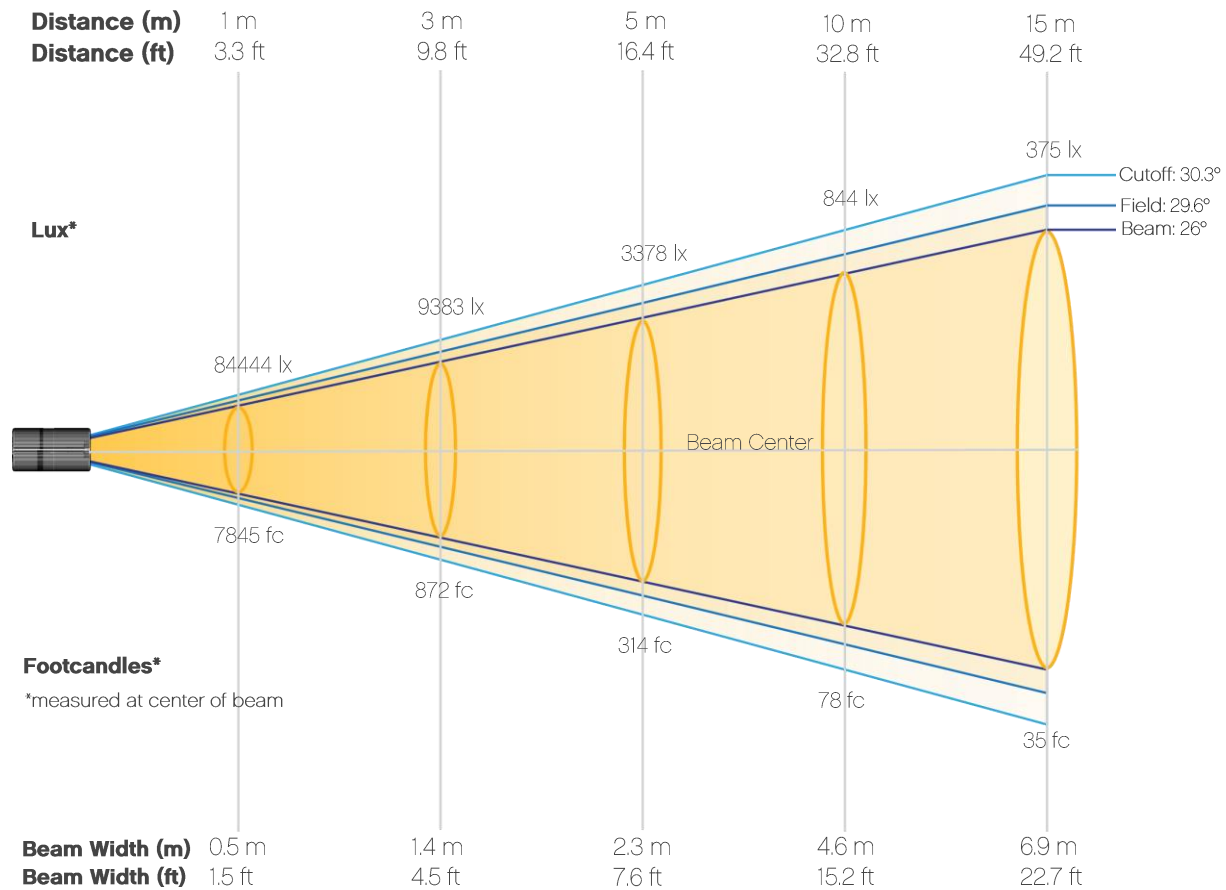


Beam Illuminances from 1-20m (3.3-65.6ft)

Distance	1m	2m	3m	4m	5m	6m	7m	8m	9m	10m
Lux	84444	21111	9383	5278	3378	2346	1723	1319	1043	844
Distance	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
Lux	698	586	500	431	375	330	292	261	234	211
Distance	3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft
FC	7845	1961	872	490	314	218	160	123	97	78
Distance	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
FC	65	54	46	40	35	31	27	24	22	20

Photometric Report

Ovation Rêve E-3: 26° Lens - Full Power


Candela Plot

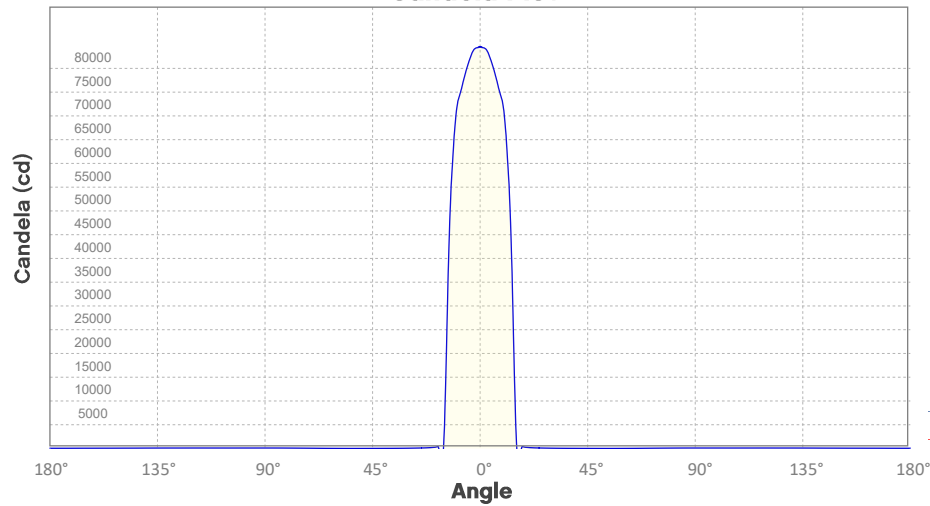

Beam Angle (50%): 26°
Field Angle (10%): 29.6°
Cutoff Angle (3%): 30.3°

— Horizontal Distribution
— Vertical Distribution


Polar Diagrams

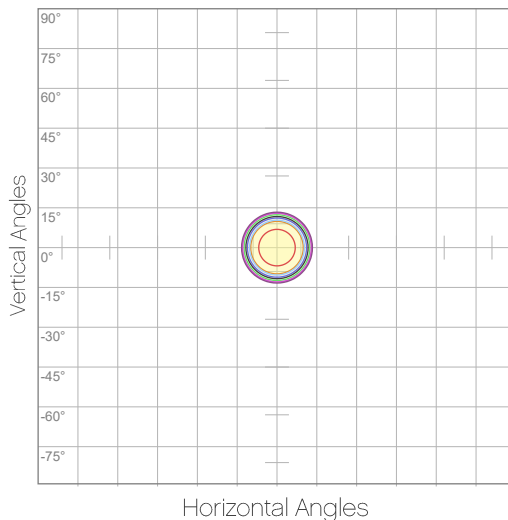

iso-candela Diagram

10%	8444 cd
20%	16889 cd
30%	25333 cd
40%	33778 cd
50%	42222 cd
60%	50667 cd
70%	59111 cd
80%	67555 cd
90%	76000 cd

Conditions:
Number of c-planes: 2
Candela at center: 84444 cd

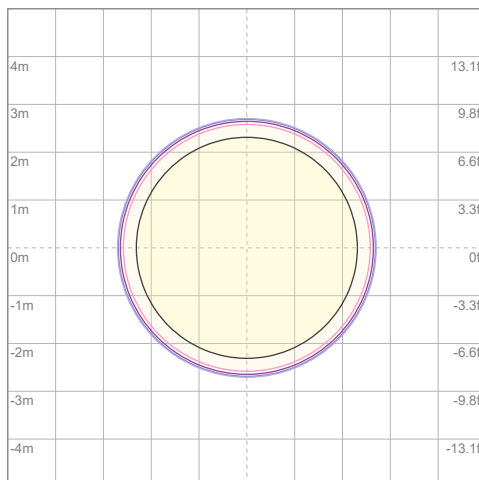

iso-illuminance Diagram

3%	25.3 lx
5%	42.2 lx
10%	84.4 lx
30%	253 lx
50%	422 lx

Conditions:
Number of c-planes: 2
Lux at center: 844 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Mounting height: 10 meters / 33 feet

Photometric Report

Ovation Rêve E-3: 36° Lens - Full Power

Report Summary

Output

Total Lumens: 13223 lm
Peak Intensity: 52127 cd
Illuminance @ 5m: 2085 lux
Fixture Efficacy: 36 lm/W

Optical

Horizontal Beam Angle (50%): 33.3°
Vertical Beam Angle (50%): 33.3°
Horizontal Field Angle (10%): 37.1°
Vertical Field Angle (10%): 37.1°
Horizontal Cutoff Angle (3%): 39.7°
Vertical Cutoff Angle (3%): 39.7°

Conditions


AC Supply: 116 V, 60 Hz
Power: 371.93 W
Current: 3.20 A
Power Factor: 1.0




This data sheet conforms to American National Standard E1.9 – 2007 (R2017). All data was measured and calculated by a Viso Systems LabSpion Goniometer at the Chauvet PD Optics Laboratory in Sunrise, FL on 3/11/2021 to LM-63-2002 Standards.

Overall Measurement


Angular Beam Distribution

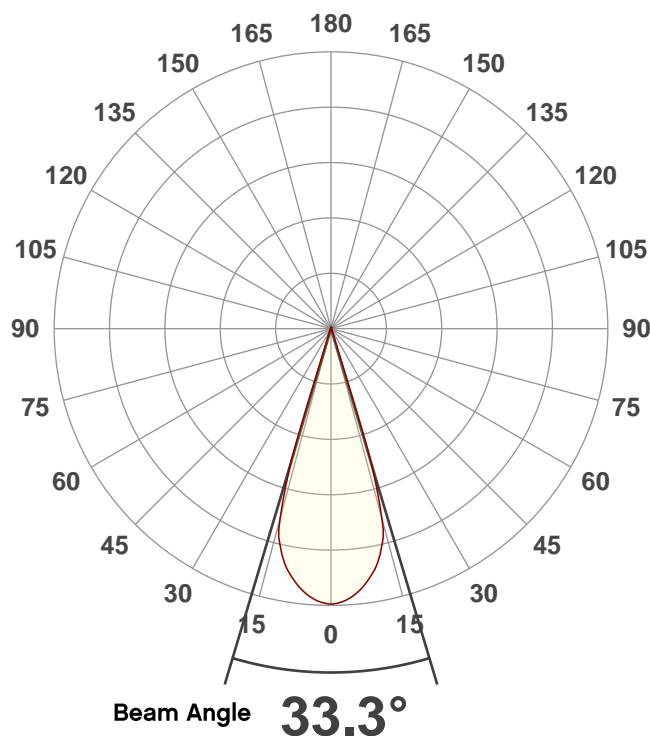

Spectral Distribution

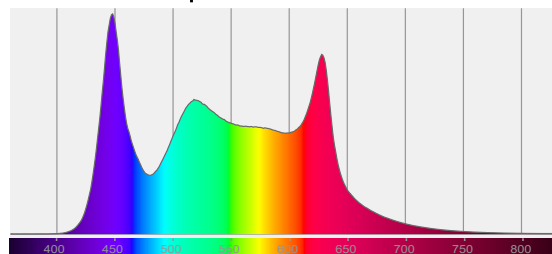


CIE 1931

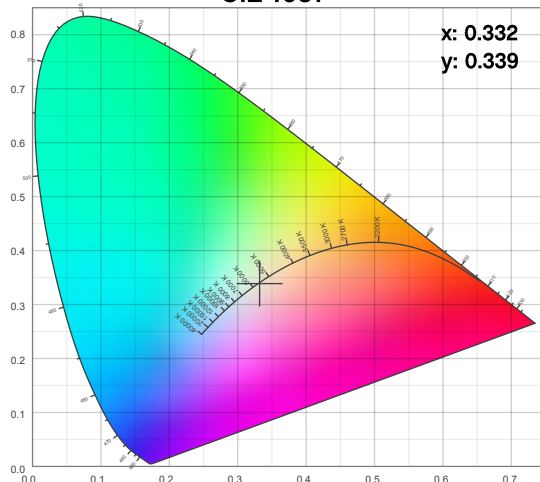

Photometric Report

Ovation Rêve E-3: 36° Lens - Full Power

Beam Details

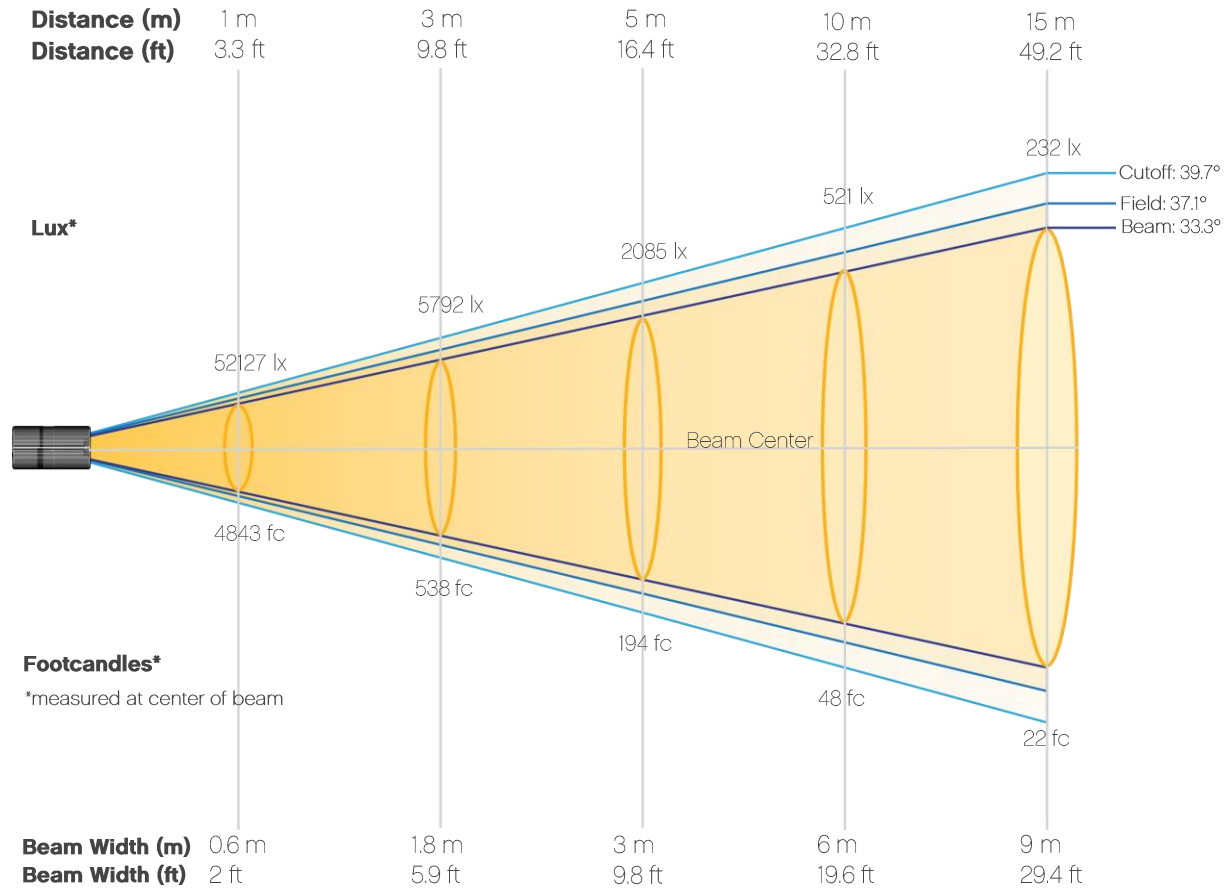


Beam Illuminances from 1-20m (3.3-65.6ft)

Distance	1m	2m	3m	4m	5m	6m	7m	8m	9m	10m
Lux	52127	13032	5792	3258	2085	1448	1064	814	644	521
Distance	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
Lux	431	362	308	266	232	204	180	161	144	130
Distance	3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft
FC	4843	1211	538	303	194	135	99	76	60	48
Distance	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
FC	40	34	29	25	22	19	17	15	13	12

Photometric Report

Ovation Rêve E-3: 36° Lens - Full Power


Candela Plot

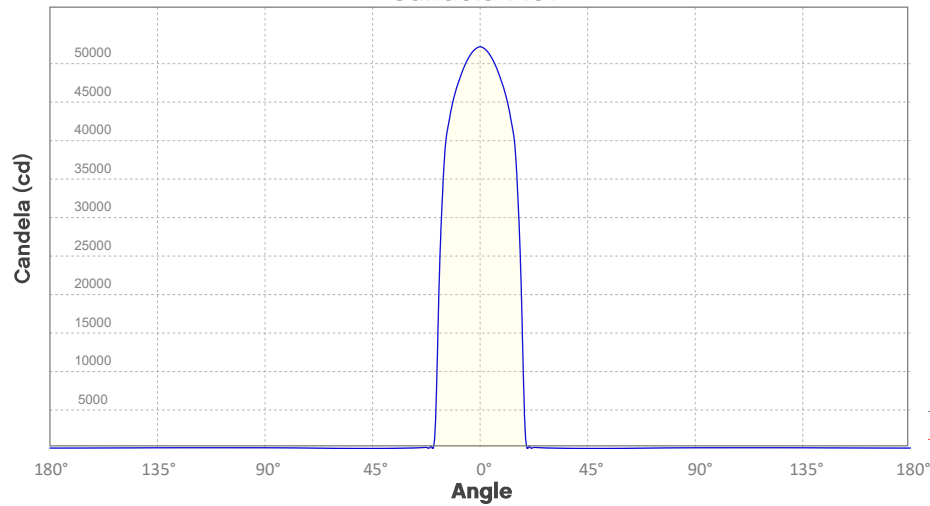

Beam Angle (50%): 33.3°
Field Angle (10%): 37.1°
Cutoff Angle (3%): 39.7°

— Horizontal Distribution
— Vertical Distribution


Polar Diagrams

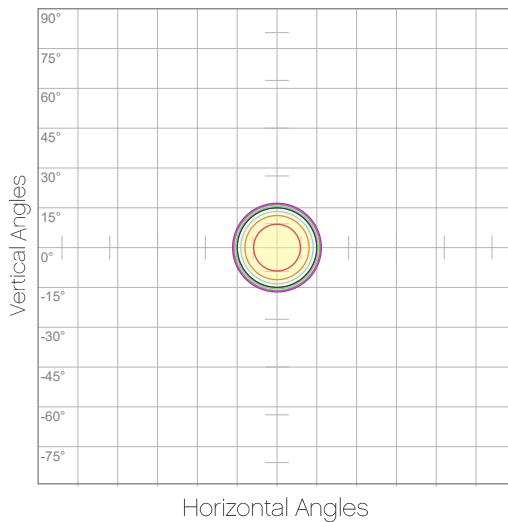

iso-candela Diagram

10%	5213 cd
20%	10425 cd
30%	15638 cd
40%	20851 cd
50%	26064 cd
60%	31276 cd
70%	36489 cd
80%	41702 cd
90%	46914 cd

Conditions:
Number of c-planes: 2
Candela at center: 52127 cd

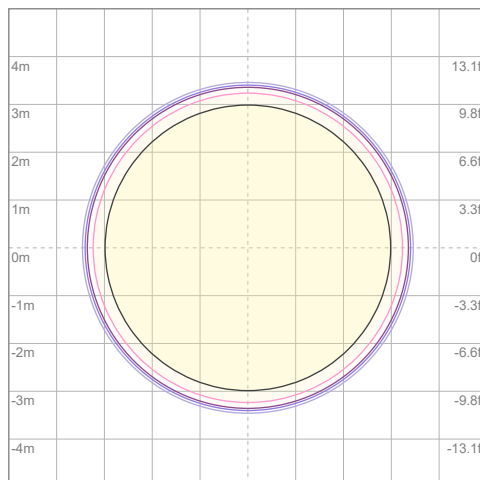

iso-illuminance Diagram

3%	15.6 lx
5%	26.1 lx
10%	52.1 lx
30%	156 lx
50%	261 lx

Conditions:
Number of c-planes: 2
Lux at center: 521 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Mounting height: 10 meters / 33 feet

Photometric Report

Ovation Rêve E-3: 50° Lens - Full Power

Report Summary

Output

Total Lumens: 12216 lm
Peak Intensity: 21751 cd
Illuminance @ 5m: 870 lux
Fixture Efficacy: 33 lm/W

Optical

Horizontal Beam Angle (50%): 49.5°
Vertical Beam Angle (50%): 49.5°
Horizontal Field Angle (10%): 55.7°
Vertical Field Angle (10%): 55.7°
Horizontal Cutoff Angle (3%): 58.9°
Vertical Cutoff Angle (3%): 58.9°




Conditions

AC Supply: 116 V, 60 Hz
Power: 373.95 W
Current: 3.22 A
Power Factor: 1.0



This data sheet conforms to American National Standard E1.9 – 2007 (R2017). All data was measured and calculated by a Viso Systems LabSpion Goniometer at the Chauvet PD Optics Laboratory in Sunrise, FL on 3/11/2021 to LM-63-2002 Standards.


Overall Measurement

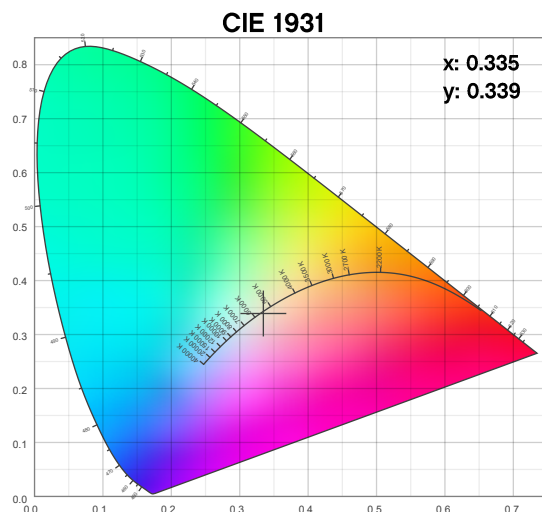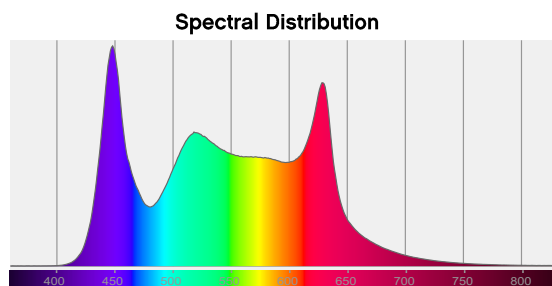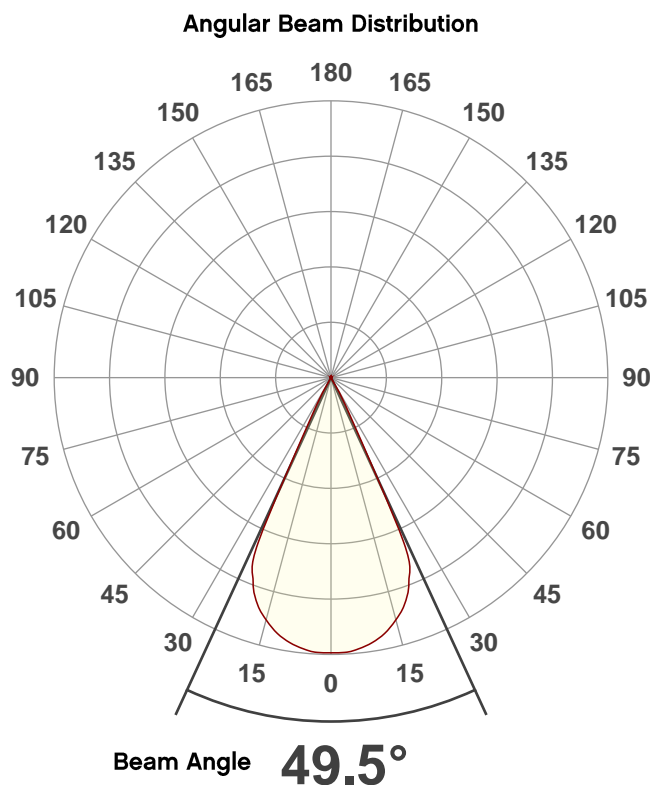

Photometric Report

Ovation Rêve E-3: 50° Lens - Full Power

Beam Details

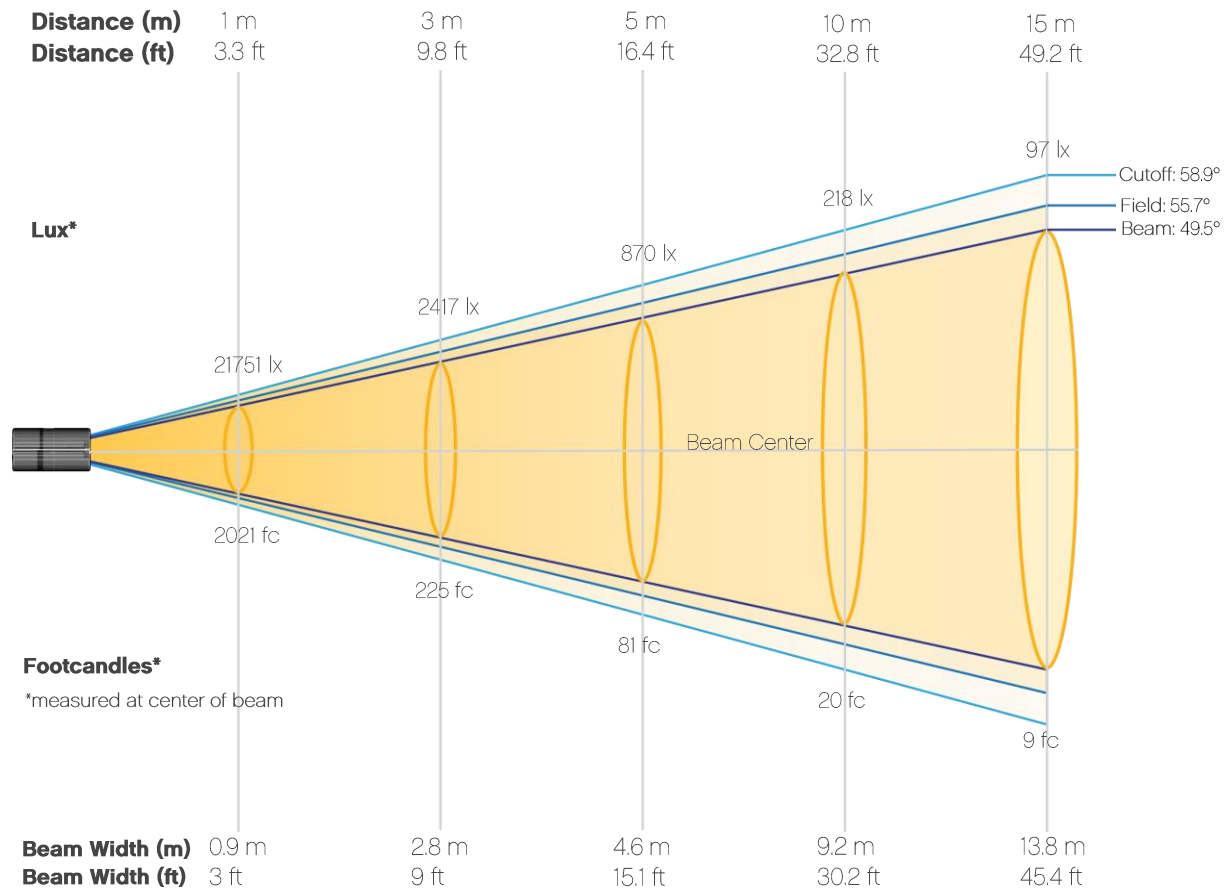


Beam Illuminances from 1-20m (3.3-65.6ft)

Distance	1m	2m	3m	4m	5m	6m	7m	8m	9m	10m
Lux	21751	5438	2417	1359	870	604	444	340	269	218
Distance	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
Lux	180	151	129	111	97	85	75	67	60	54
Distance	3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft
FC	2021	505	225	126	81	56	41	32	25	20
Distance	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
FC	17	14	12	10	9	8	7	6	6	5

Photometric Report

Ovation Rêve E-3: 50° Lens - Full Power


Candela Plot

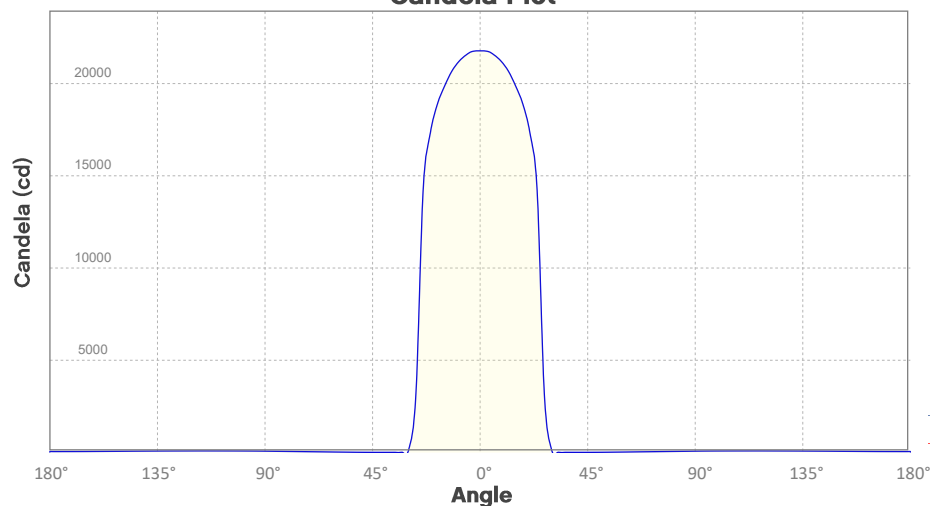

Beam Angle (50%): 49.5°
Field Angle (10%): 55.7°
Cutoff Angle (3%): 58.9°

— Horizontal Distribution
— Vertical Distribution


Polar Diagrams

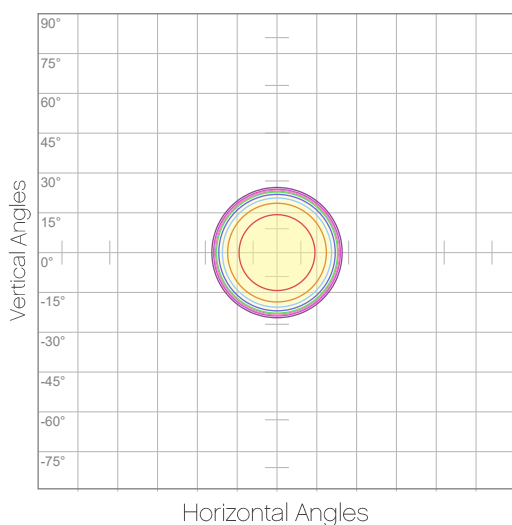

iso-candela Diagram

10%	2175 cd
20%	4350 cd
30%	6525 cd
40%	8700 cd
50%	10875 cd
60%	13050 cd
70%	15225 cd
80%	17400 cd
90%	19575 cd

Conditions:
Number of c-planes: 2
Candela at center: 21751 cd

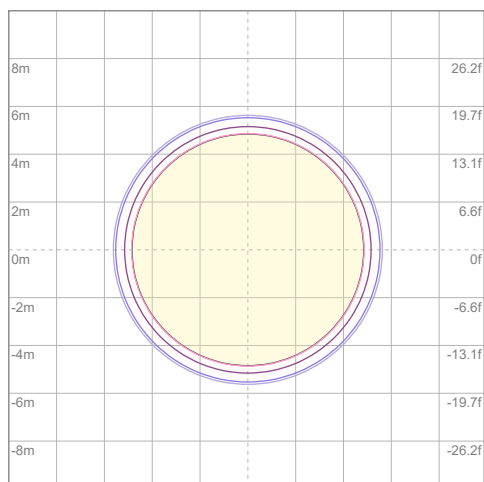

iso-illuminance Diagram

3%	6.53 lx
5%	10.9 lx
10%	21.8 lx
30%	65.3 lx
50%	109 lx

Conditions:
Number of c-planes: 2
Lux at center: 218 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Mounting height: 10 meters / 33 feet

Photometric Report

Ovation Rêve E-3: 15°-30° Zoom Lens - 15° - Full Power

Report Summary

Output

Total Lumens: 9031 lm
Peak Intensity: 232292 cd
Illuminance @ 5m: 9292 lux
Fixture Efficacy: 57 lm/W

Optical

Horizontal Beam Angle (50%): 13°
Vertical Beam Angle (50%): 13°
Horizontal Field Angle (10%): 15.4°
Vertical Field Angle (10%): 15.4°
Horizontal Cutoff Angle (3%): 16.4°
Vertical Cutoff Angle (3%): 16.4°




Conditions

AC Supply: 121 V, 60 Hz
Power: 765.96 W
Current: 6.36 A
Power Factor: 0.21


This data sheet conforms to American National Standard E1.9 – 2007 (R2017). All data was measured and calculated by a Viso Systems LabSpion Goniometer at the Chauvet PD Optics Laboratory in Sunrise, FL on 3/1/2021 to LM-63-2002 Standards.

Overall Measurement


Angular Beam Distribution

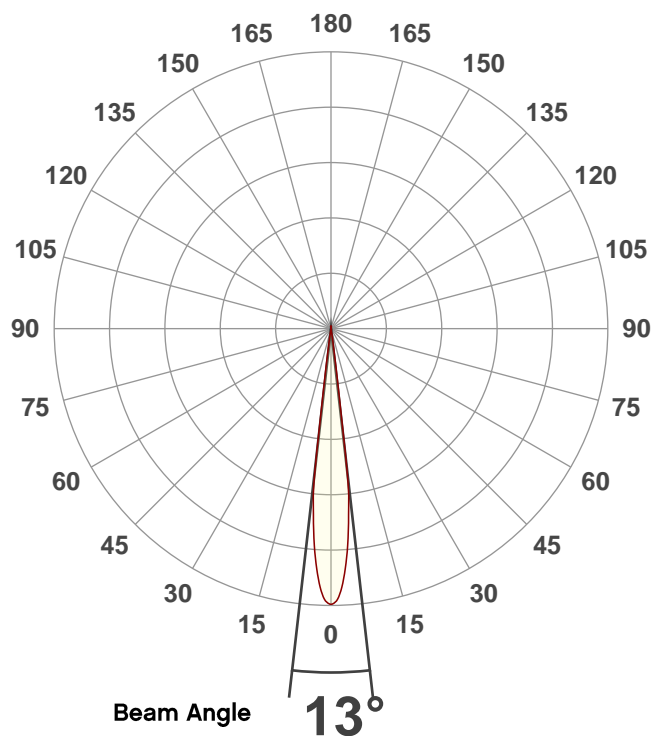

Spectral Distribution

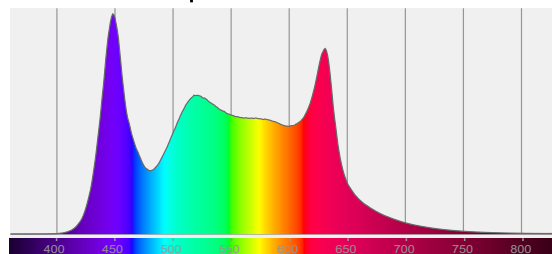


CIE 1931

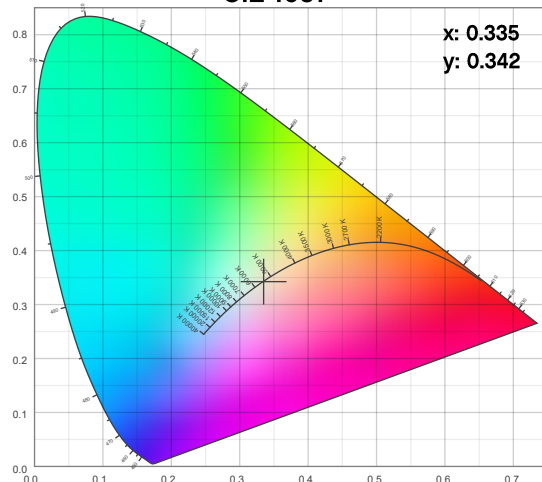

Photometric Report

Ovation Rêve E-3: 15°-30° Zoom Lens - 15° - Full Power

Beam Details

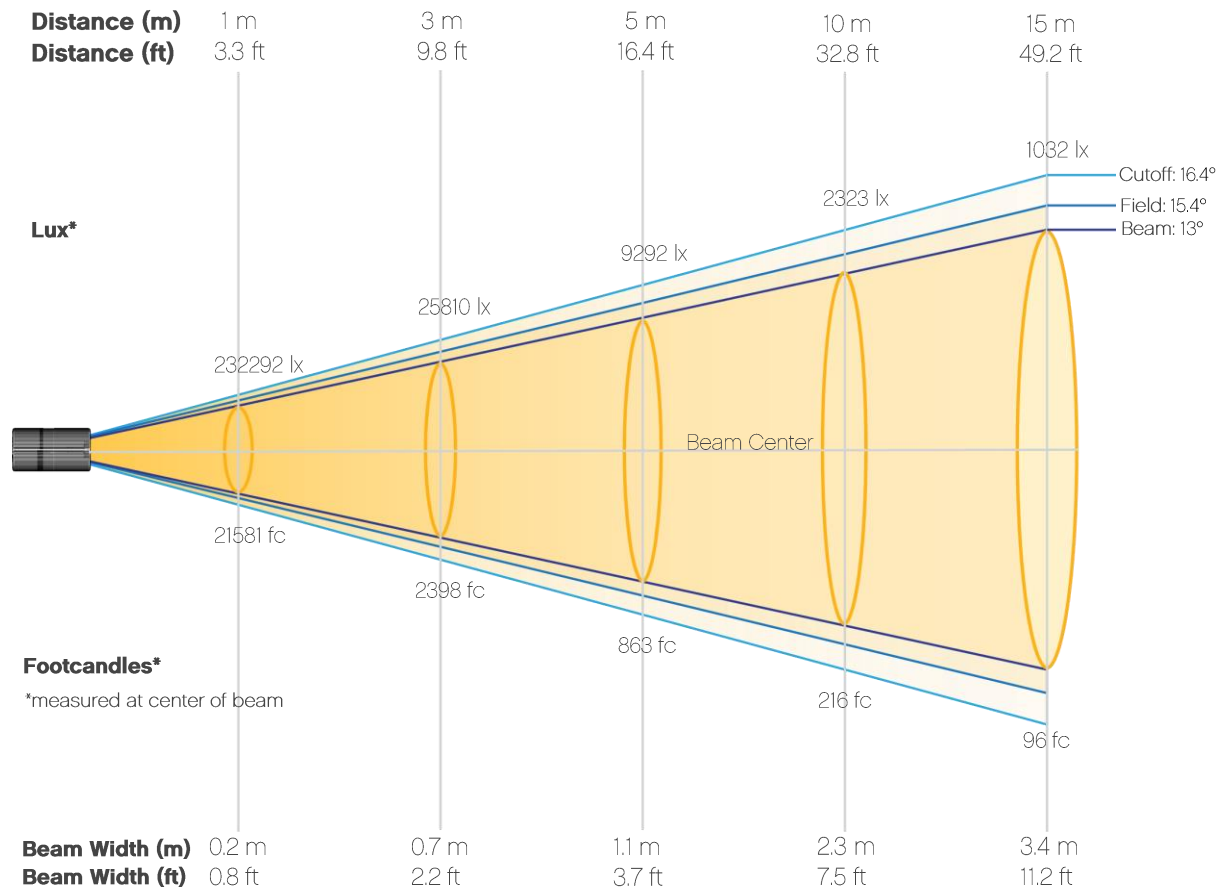


Beam Illuminances from 1-20m (3.3-65.6ft)

Distance	1m	2m	3m	4m	5m	6m	7m	8m	9m	10m
Lux	232292	58073	25810	14518	9292	6453	4741	3630	2868	2323
Distance	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
Lux	1920	1613	1375	1185	1032	907	804	717	643	581
Distance	3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft
FC	21581	5395	2398	1349	863	599	440	337	266	216
Distance	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
FC	178	150	128	110	96	84	75	67	60	54

Photometric Report


Ovation Rêve E-3: 15°-30° Zoom Lens - 15° - Full Power

Candela Plot

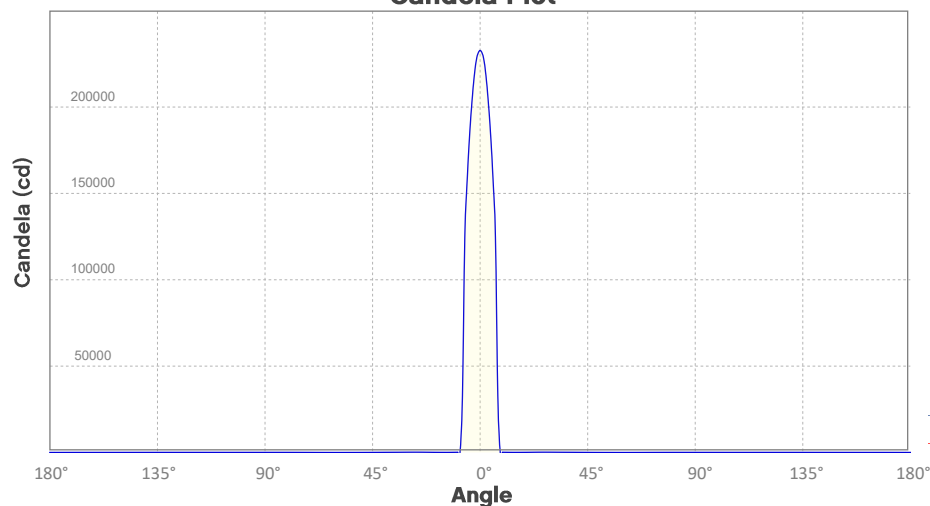

Beam Angle (50%): 13°
Field Angle (10%): 15.4°
Cutoff Angle (3%): 16.4°


Polar Diagrams

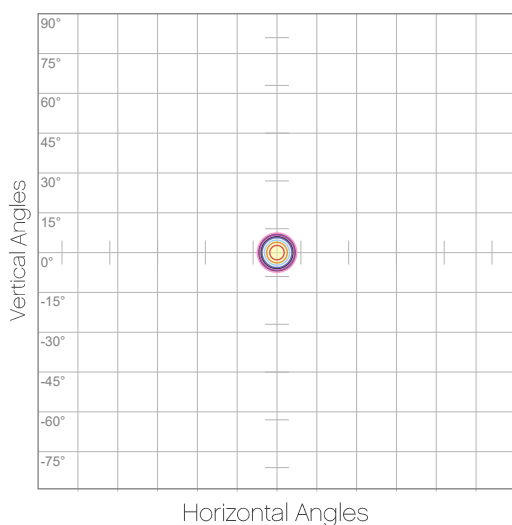

iso-candela Diagram

10%	23229 cd
20%	46458 cd
30%	69688 cd
40%	92917 cd
50%	116146 cd
60%	139375 cd
70%	162605 cd
80%	185834 cd
90%	209063 cd

Conditions:
Number of c-planes: 2
Candela at center: 232292 cd

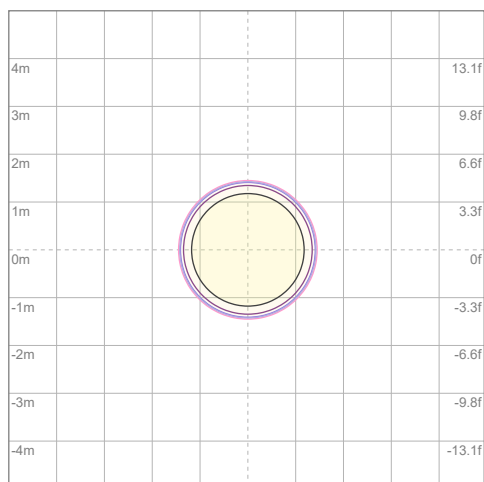

iso-illuminance Diagram

3%	69.7 lx
5%	116 lx
10%	232 lx
30%	697 lx
50%	1161 lx

Conditions:
Number of c-planes: 2
Lux at center: 2323 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Mounting height: 10 meters / 33 feet

Photometric Report

Ovation Rêve E-3: 15°-30° Zoom Lens - 30° - Full Power

Report Summary

Output

Total Lumens: 12057 lm
Peak Intensity: 66784 cd
Illuminance @ 5m: 2671 lux
Fixture Efficacy: 59 lm/W

Optical

Horizontal Beam Angle (50%): 28.5°
Vertical Beam Angle (50%): 28.5°
Horizontal Field Angle (10%): 32.2°
Vertical Field Angle (10%): 32.2°
Horizontal Cutoff Angle (3%): 33.7°
Vertical Cutoff Angle (3%): 33.7°






Conditions

AC Supply: 120 V, 60 Hz
Power: 913.5 W
Current: 7.59 A
Power Factor: 0.22

This data sheet conforms to American National Standard E1.9 – 2007 (R2017). All data was measured and calculated by a Viso Systems LabSpion Goniometer at the Chauvet PD Optics Laboratory in Sunrise, FL on 3/1/2021 to LM-63-2002 Standards.


Overall Measurement

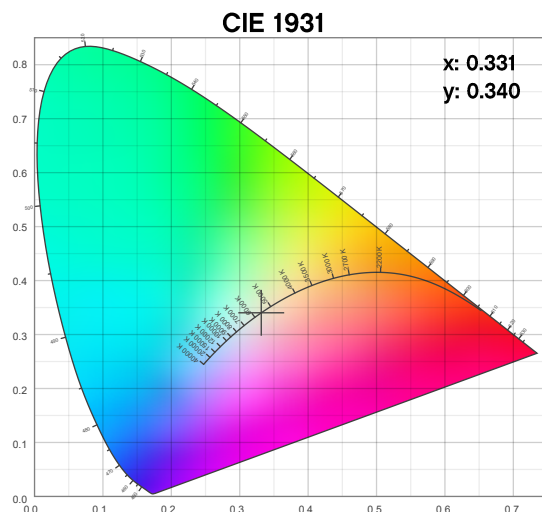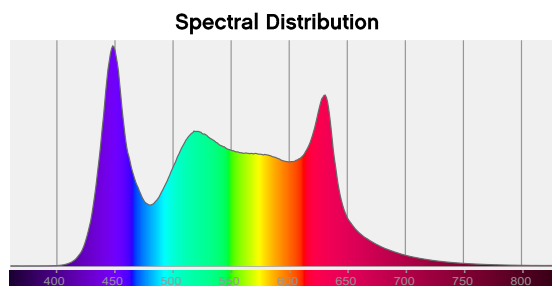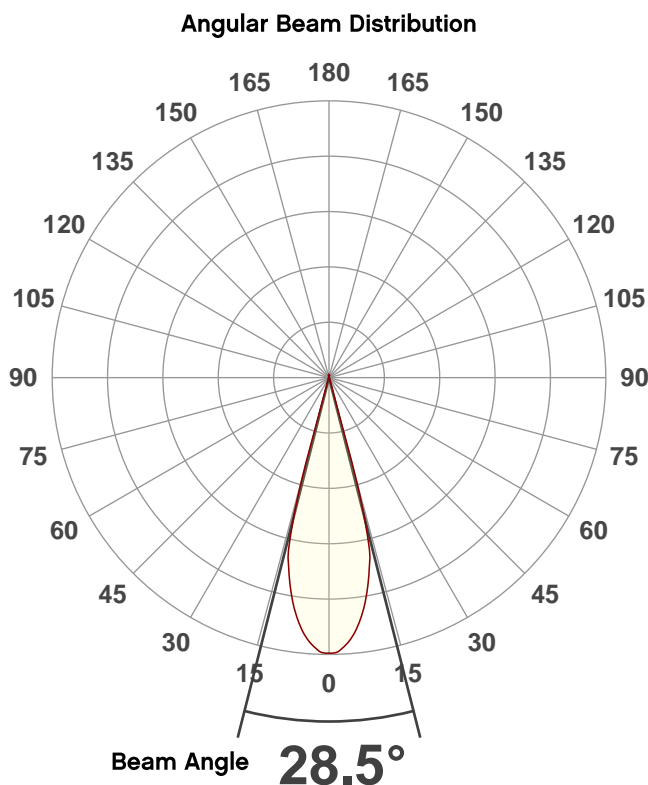

Photometric Report

Ovation Rêve E-3: 15°-30° Zoom Lens - 30° - Full Power

Beam Details

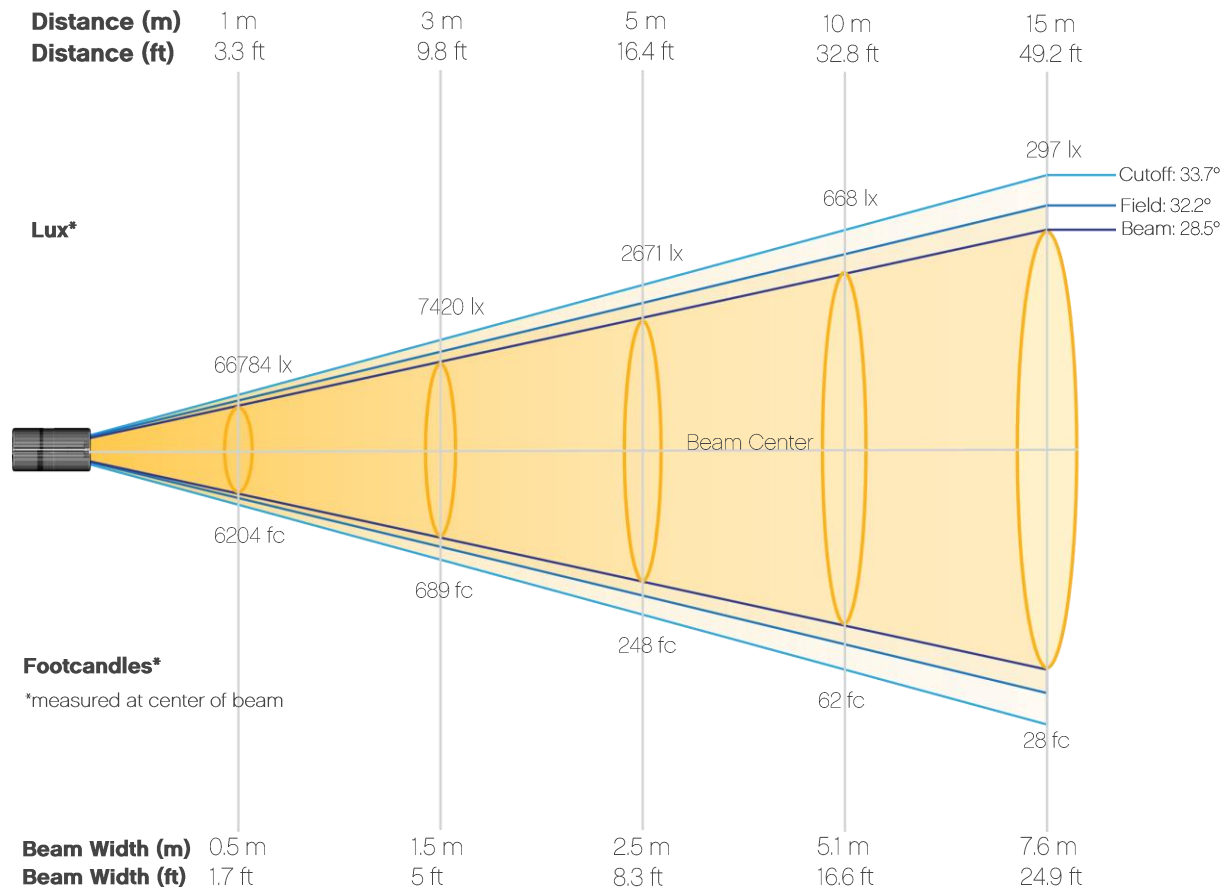


Beam Illuminances from 1-20m (3.3-65.6ft)

Distance	1m	2m	3m	4m	5m	6m	7m	8m	9m	10m
Lux	66784	16696	7420	4174	2671	1855	1363	1044	824	668
Distance	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
Lux	552	464	395	341	297	261	231	206	185	167
Distance	3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft
FC	6204	1551	689	388	248	172	127	97	77	62
Distance	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
FC	51	43	37	32	28	24	21	19	17	16

Photometric Report

Ovation Rêve E-3: 15°-30° Zoom Lens - 30° - Full Power


Candela Plot

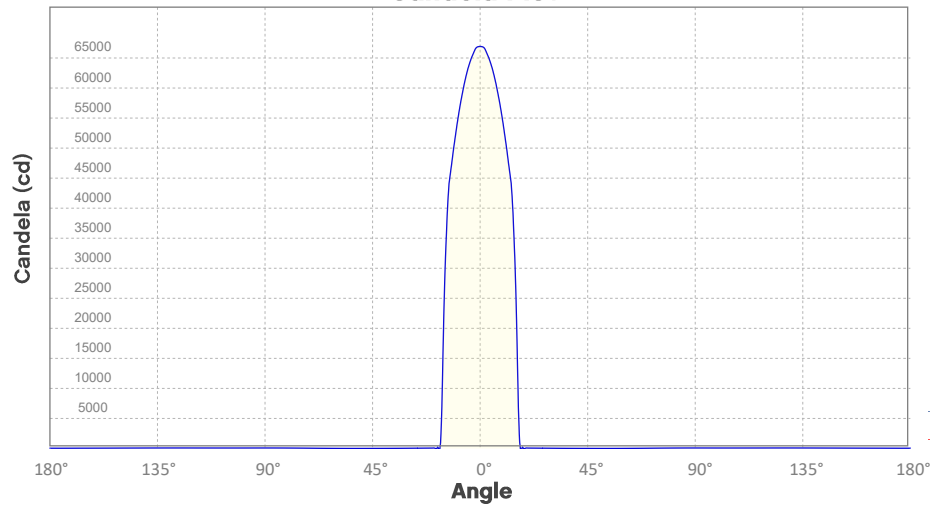

Beam Angle (50%): 28.5°
Field Angle (10%): 32.2°
Cutoff Angle (3%): 33.7°

— Horizontal Distribution
— Vertical Distribution


Polar Diagrams

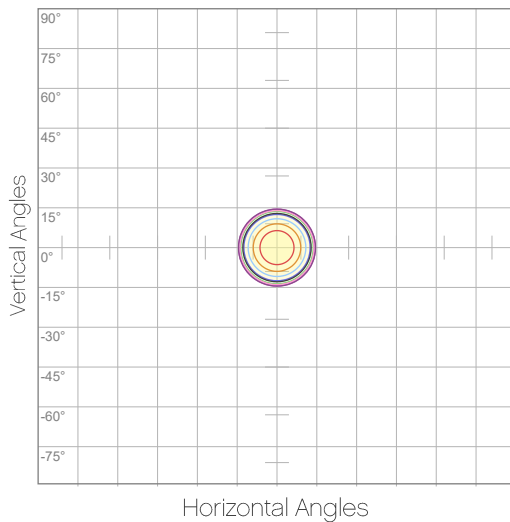

iso-candela Diagram

10%	6678 cd
20%	13357 cd
30%	20035 cd
40%	26714 cd
50%	33392 cd
60%	40071 cd
70%	46749 cd
80%	53427 cd
90%	60106 cd

Conditions:
Number of c-planes: 2
Candela at center: 66784 cd

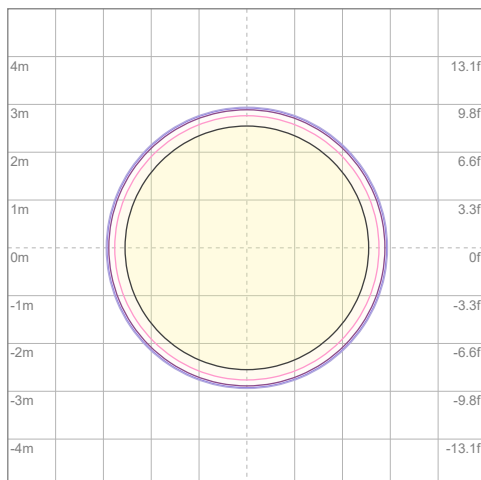

iso-illuminance Diagram

3%	20.0 lx
5%	33.4 lx
10%	66.8 lx
30%	200 lx
50%	334 lx

Conditions:
Number of c-planes: 2
Lux at center: 668 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Mounting height: 10 meters / 33 feet

Photometric Report

Ovation Rêve E-3: 25°-50° Zoom Lens - 25° - Full Power

Report Summary

Output

Total Lumens: 12340 lm
Peak Intensity: 92745 cd
Illuminance @ 5m: 3710 lux
Fixture Efficacy: 10 lm/W

Optical

Horizontal Beam Angle (50%): 23.6°
Vertical Beam Angle (50%): 23.6°
Horizontal Field Angle (10%): 25.8°
Vertical Field Angle (10%): 25.8°
Horizontal Cutoff Angle (3%): 28.3°
Vertical Cutoff Angle (3%): 28.3°




Conditions

AC Supply: 118 V, 60 Hz
Power: 1307.53 W
Current: 11.1 A
Power Factor: 0.97


This data sheet conforms to American National Standard E1.9 – 2007 (R2017). All data was measured and calculated by a Viso Systems LabSpion Goniometer at the Chauvet PD Optics Laboratory in Sunrise, FL on 3/1/2021 to LM-63-2002 Standards.

Overall Measurement


Angular Beam Distribution

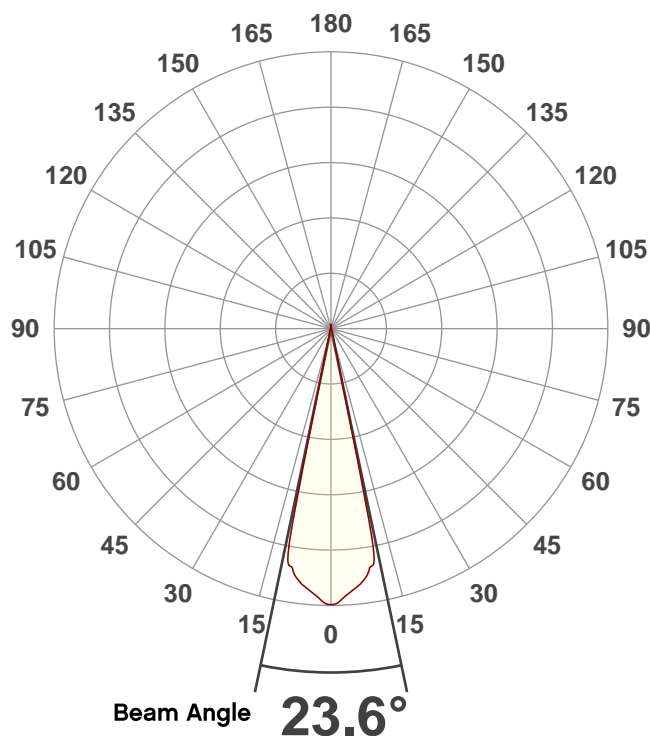

Spectral Distribution

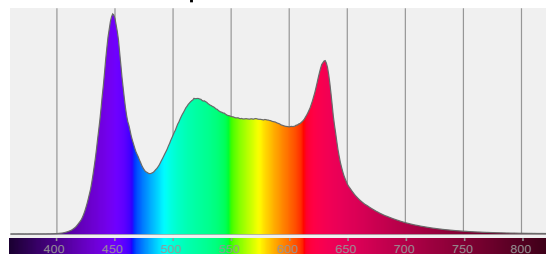


CIE 1931

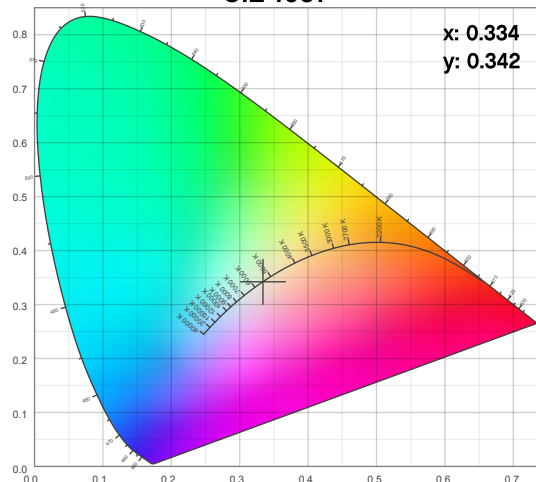

Photometric Report

Ovation Rêve E-3: 25°-50° Zoom Lens - 25° - Full Power

Beam Details

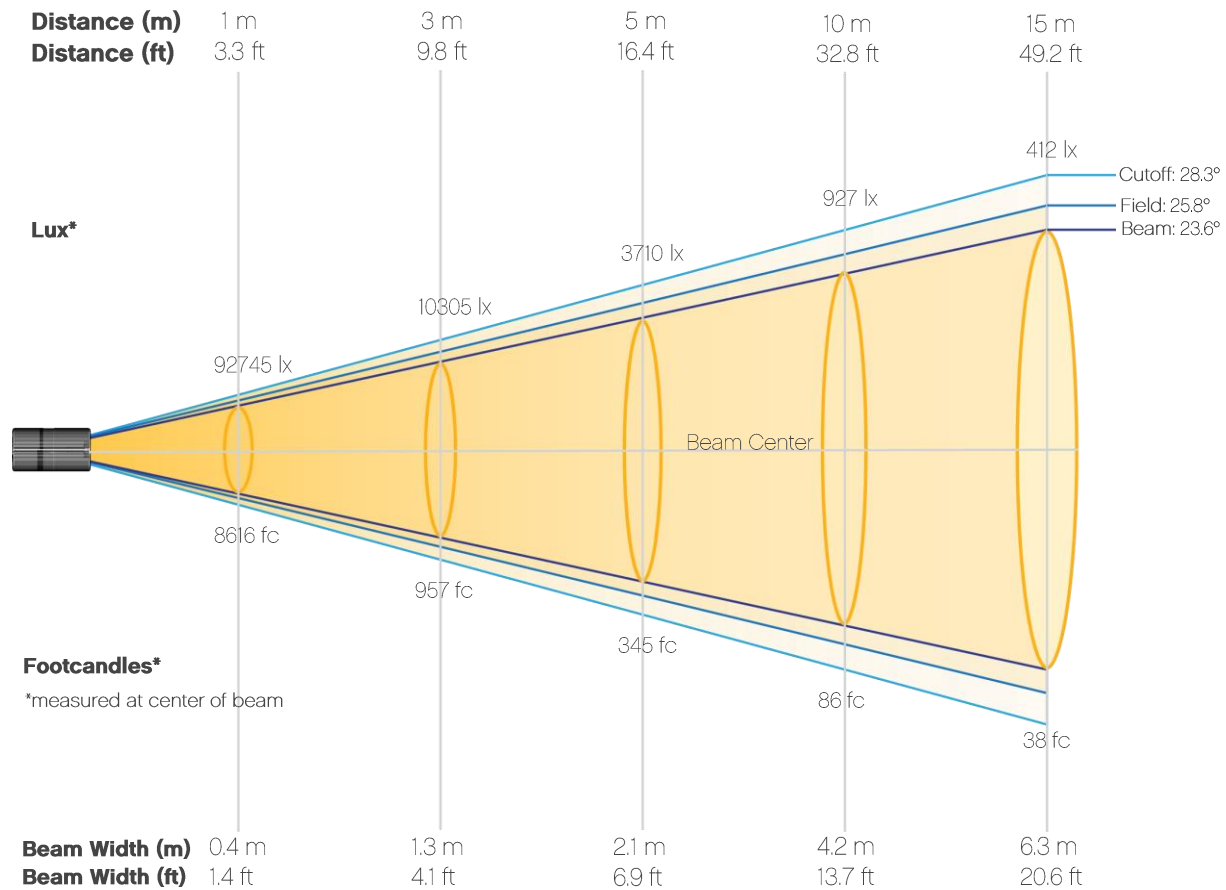


Beam Illuminances from 1-20m (3.3-65.6ft)

Distance	1m	2m	3m	4m	5m	6m	7m	8m	9m	10m
Lux	92745	23186	10305	5797	3710	2576	1893	1449	1145	927
Distance	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
Lux	766	644	549	473	412	362	321	286	257	232
Distance	3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft
FC	8616	2154	957	539	345	239	176	135	106	86
Distance	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
FC	71	60	51	44	38	34	30	27	24	22

Photometric Report

Ovation Rêve E-3: 25°-50° Zoom Lens - 25° - Full Power


Candela Plot

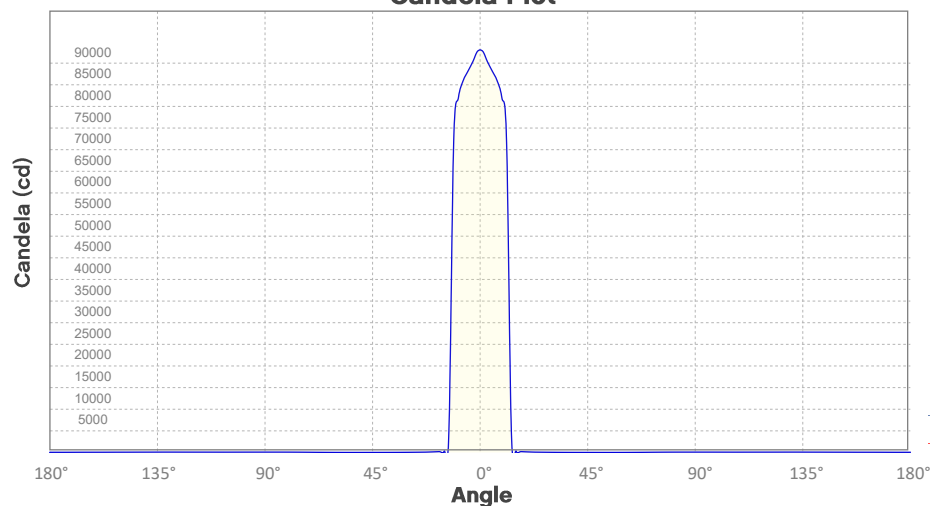

Beam Angle (50%): 23.6°
Field Angle (10%): 25.8°
Cutoff Angle (3%): 28.3°

— Horizontal Distribution
— Vertical Distribution


Polar Diagrams

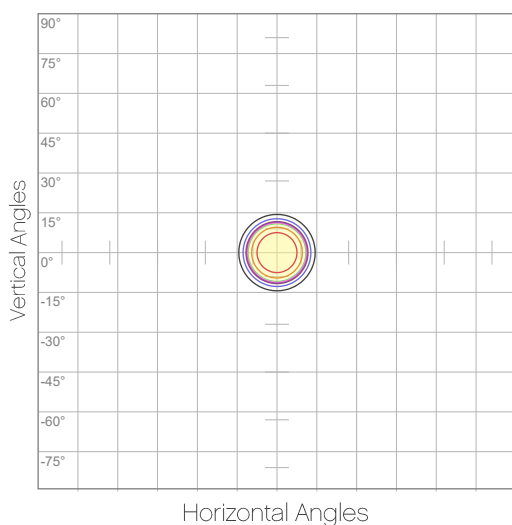

iso-candela Diagram

10%	9275 cd
20%	18549 cd
30%	27824 cd
40%	37098 cd
50%	46373 cd
60%	55647 cd
70%	64922 cd
80%	74196 cd
90%	83471 cd

Conditions:
Number of c-planes: 2
Candela at center: 92745 cd

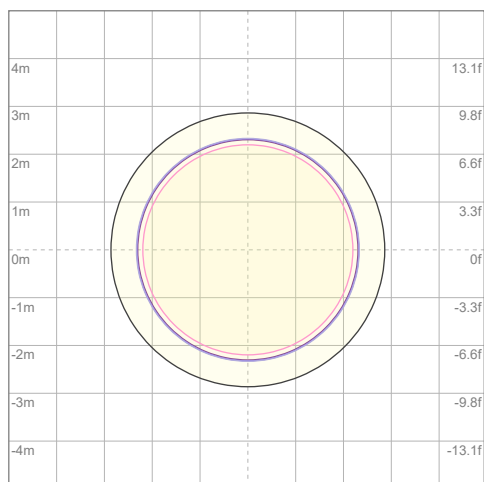

iso-illuminance Diagram

3%	27.8 lx
5%	46.4 lx
10%	92.7 lx
30%	278 lx
50%	464 lx

Conditions:
Number of c-planes: 2
Lux at center: 927 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Mounting height: 10 meters / 33 feet

Photometric Report

Ovation Rêve E-3: 25°-50° Zoom Lens - 50° - Full Power

Report Summary

Output

Total Lumens: 14355 lm
Peak Intensity: 38186 cd
Illuminance @ 5m: 1527 lux
Fixture Efficacy: 10 lm/W

Optical

Horizontal Beam Angle (50%): 40.5°
Vertical Beam Angle (50%): 40.5°
Horizontal Field Angle (10%): 44.1°
Vertical Field Angle (10%): 44.1°
Horizontal Cutoff Angle (3%): 44.8°
Vertical Cutoff Angle (3%): 44.8°




Conditions

AC Supply: 118 V, 60 Hz
Power: 1492.51 W
Current: 12.6 A
Power Factor: 0.96



This data sheet conforms to American National Standard E1.9 – 2007 (R2017). All data was measured and calculated by a Viso Systems LabSpion Goniometer at the Chauvet PD Optics Laboratory in Sunrise, FL on 3/1/2021 to LM-63-2002 Standards.


Overall Measurement

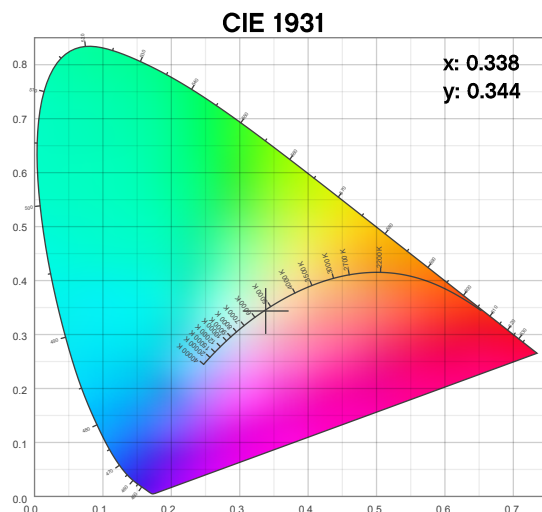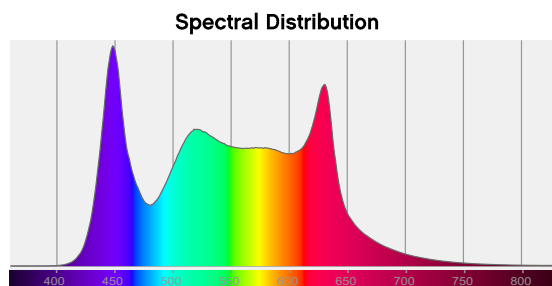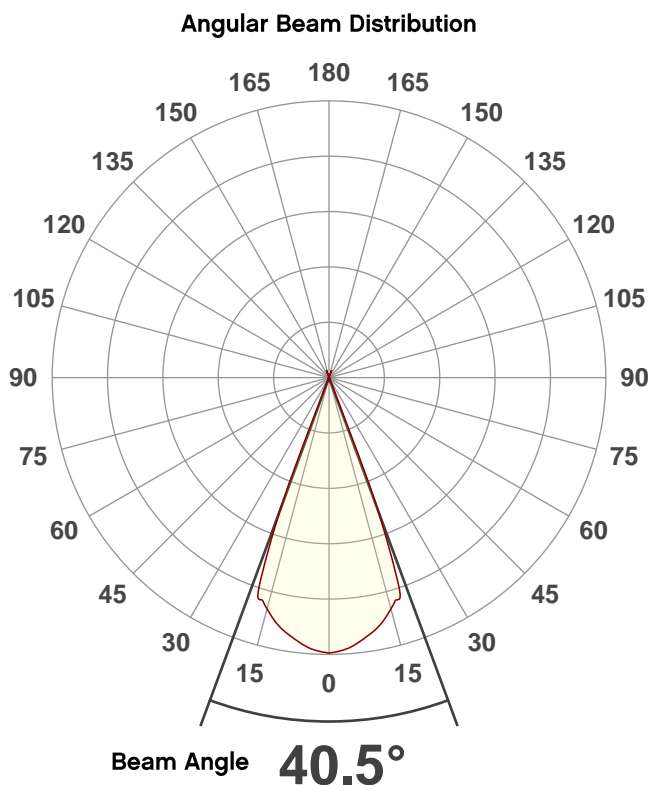

Photometric Report

Ovation Rêve E-3: 25°-50° Zoom Lens - 50° - Full Power

Beam Details

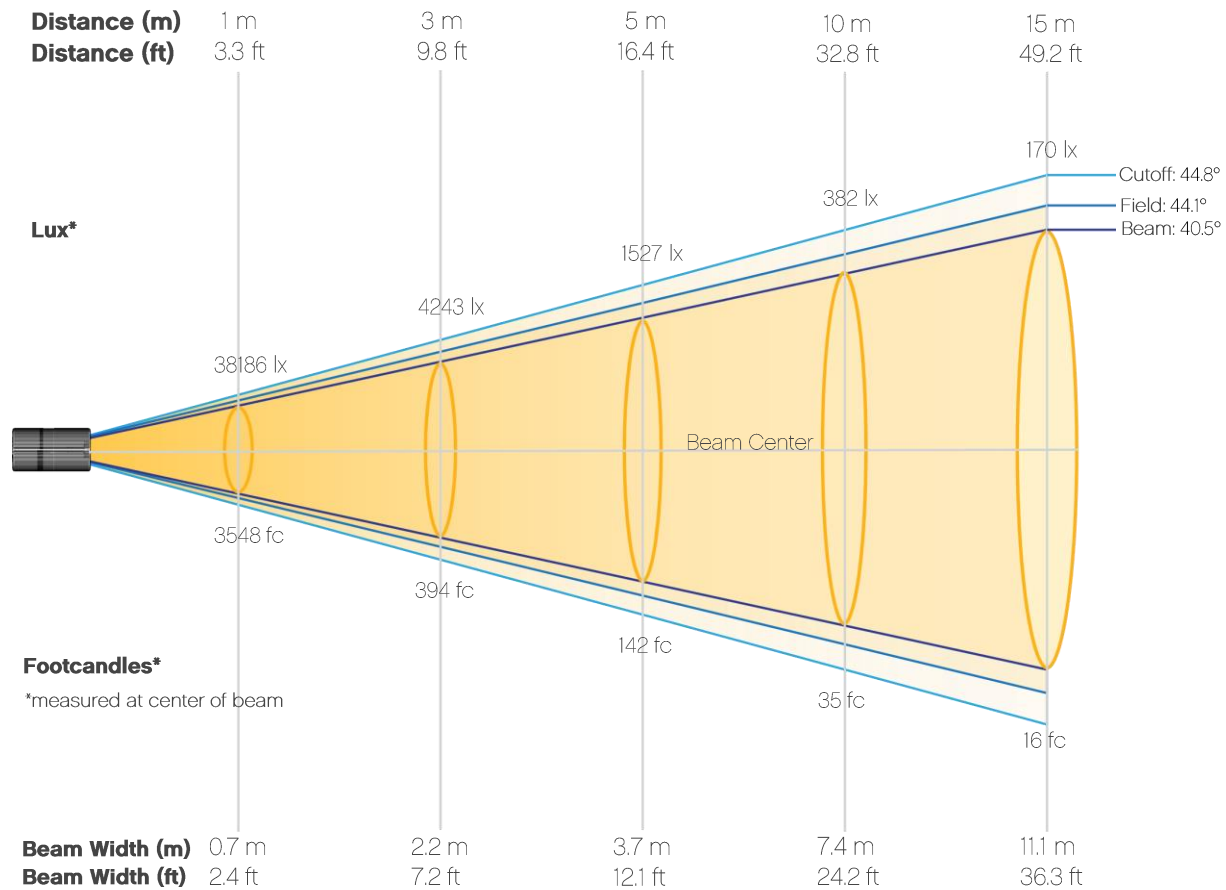


Beam Illuminances from 1-20m (3.3-65.6ft)

Distance	1m	2m	3m	4m	5m	6m	7m	8m	9m	10m
Lux	38186	9547	4243	2387	1527	1061	779	597	471	382
Distance	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
Lux	316	265	226	195	170	149	132	118	106	95
Distance	3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft
FC	3548	887	394	222	142	99	72	55	44	35
Distance	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
FC	29	25	21	18	16	14	12	11	10	9

Photometric Report

Ovation Rêve E-3: 25°-50° Zoom Lens - 50° - Full Power


Candela Plot

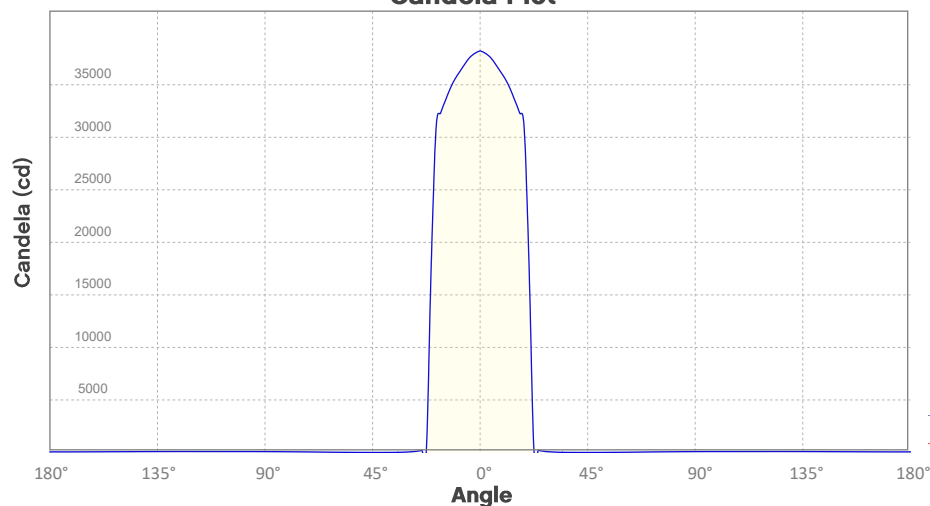

Beam Angle (50%): 40.5°
Field Angle (10%): 44.1°
Cutoff Angle (3%): 44.8°

— Horizontal Distribution
— Vertical Distribution


Polar Diagrams

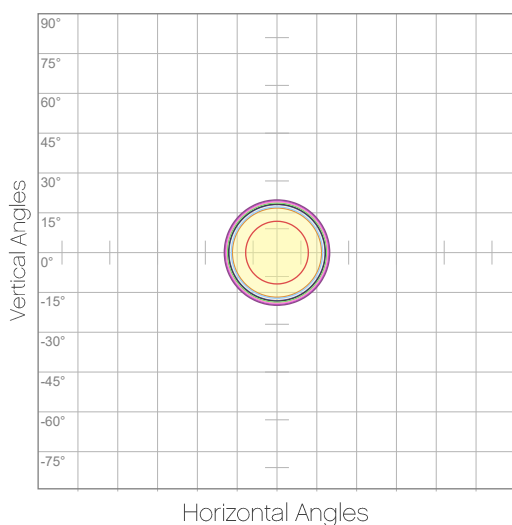

iso-candela Diagram

10%	3819 cd
20%	7637 cd
30%	11456 cd
40%	15274 cd
50%	19093 cd
60%	22912 cd
70%	26730 cd
80%	30549 cd
90%	34368 cd

Conditions:
Number of c-planes: 2
Candela at center: 38186 cd

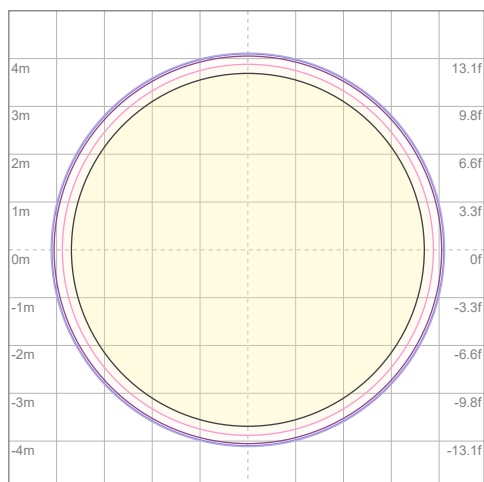

iso-illuminance Diagram

3%	11.5 lx
5%	19.1 lx
10%	38.2 lx
30%	115 lx
50%	191 lx

Conditions:
Number of c-planes: 2
Lux at center: 382 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Mounting height: 10 meters / 33 feet

Chromaticity Report

Ovation Rêve E-3: 3200K - 26° Lens - Full Power

Report Summary

Measurements

Total Lumens: 11172 lm

Peak Intensity: 71027 cd

Fixture Efficacy: 37 lm/W

Correlated Color Temperature: 3254K

Δuv : -0.0004

CRI: 95.4 CRI R9 Value: 95.9

CQS: 95.3

TLCI: 89

TM-30-18 Rf: 94.3


TM-30-18 Rg: 103.6

1st Dominant Wavelength: 631 nm

2nd Dominant Wavelength: 584 nm



Spectral Distribution

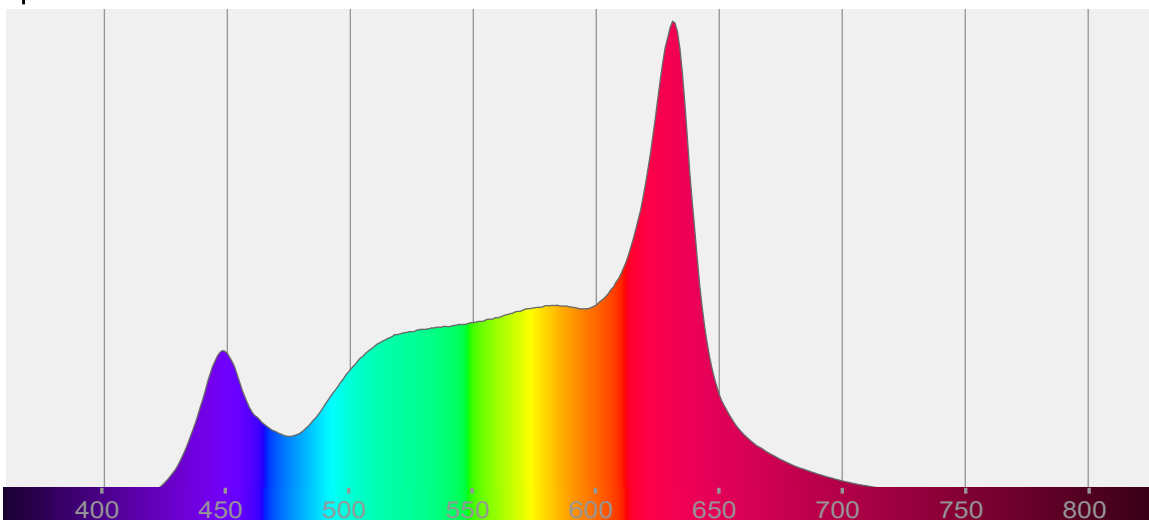

Tested Color

3254 K

CIE 1931 Coordinates:

X: 0.420 Y: 0.397

Color Temperature

3254 K

Light Quality

CRI: 95.4


Notes:

Chromaticity Report


Ovation Rêve E-3: 3200K - 26° Lens - Full Power

Chromaticity


CIE 1931

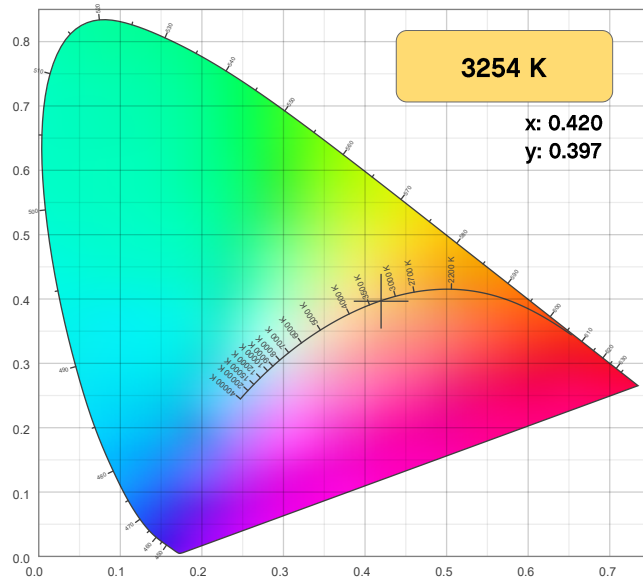


CIE 1931 - Zoom

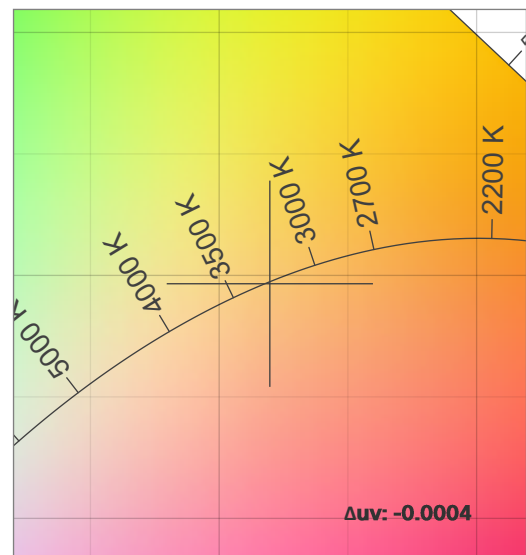

CRI: 95.4 (R1-R8)

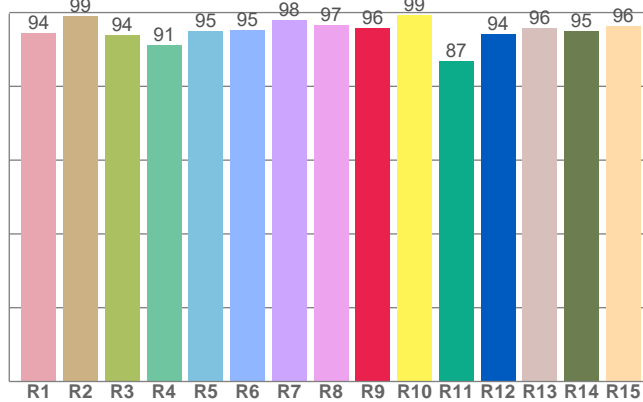

CQS: 95.3

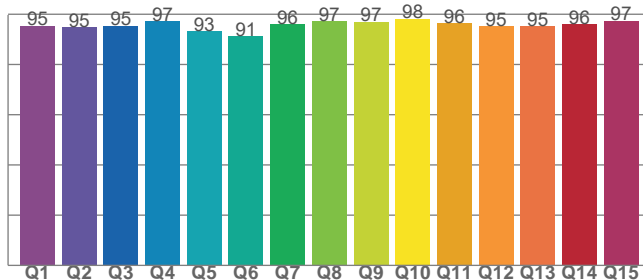

Color Parameters

Color Temperature	Color Coordinate CIE 1931	Color Coordinate CIE 1931
CCT	x	y
3254 K	0.420	0.397

Color Deviation from Black Body Curve	Color Coordinate CIE 1964	Color Coordinate CIE 1964
Δ_{uv}	y	u
-0.0004	0.397	0.243

Color Rendering Index	Red Component	Color Quality Scale
CRI	CRI - R9	CQS
95.4	95.9	95.3

Television Lighting Consistency Index	Color Fidelity	Color Gamut
TLCI	TM-30-18 - Rf	TM-30-18 Rg
89	94.3	103.6

Chromaticity Report

Ovation Rêve E-3: 3200K - 26° Lens - Full Power

TM-30-18 Details


Rf 94.3

Fidelity Index
(R_f)


Rg 103.6

Gamut Index (R_g)


Color Vector Graphic




Color Distortion Graphic




Hue Bin	R _f	Chroma Shift	Hue Shift
1	95	0%	-1%
2	96	1%	-1%
3	95	0%	0%
4	98	0%	0%
5	95	0%	2%
6	92	4%	3%
7	95	3%	0%
8	93	4%	-1%
9	95	2%	-1%
10	97	1%	-1%
11	96	2%	1%
12	89	5%	-5%
13	89	2%	-8%
14	91	3%	-5%
15	93	1%	-3%
16	90	2%	-6%

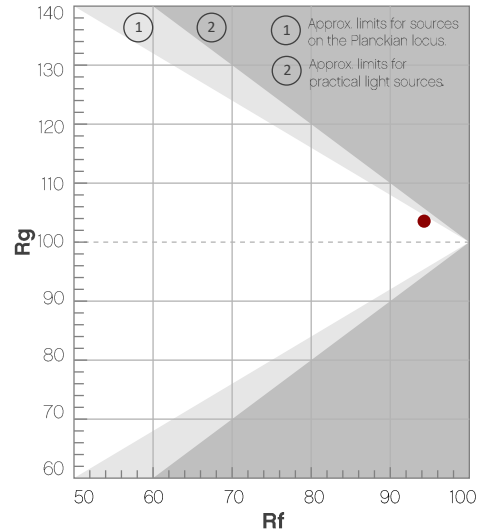


R_f by Hue Bin

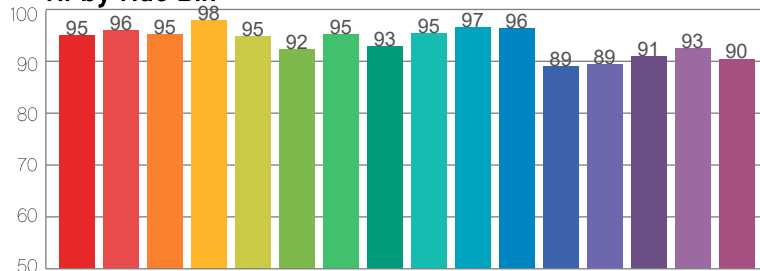

Local Chroma Shift by Hue Bin

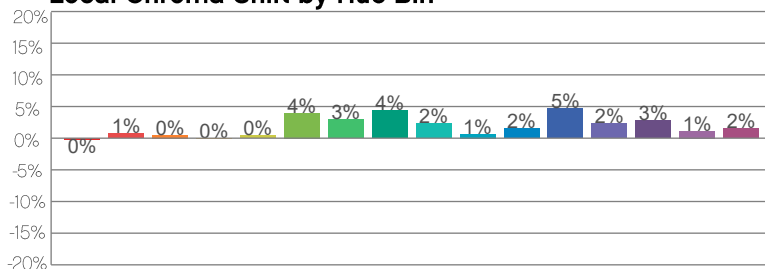

Color Sample Fidelity

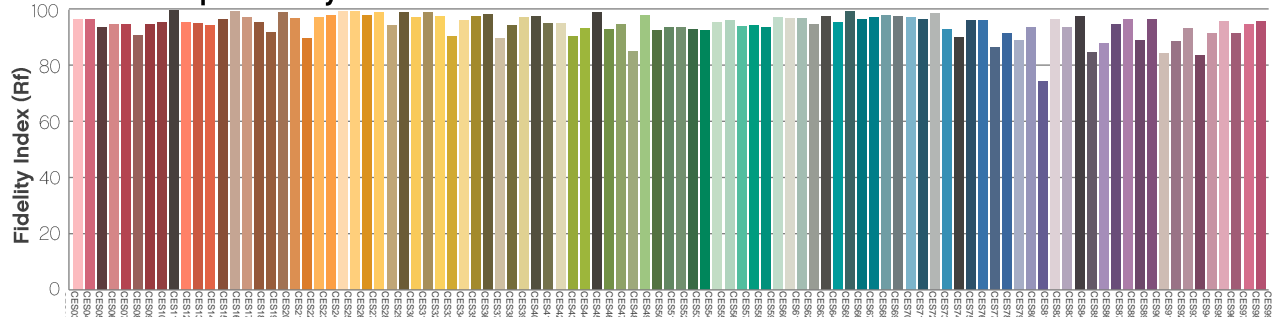

Chromaticity Report

Ovation Rêve E-3: 4000K - 26° Lens - Full Power

Report Summary

Measurements

Total Lumens: 12487 lm

Peak Intensity: 78926 cd

Fixture Efficacy: 36 lm/W

Correlated Color Temperature: 4053K

Δuv : 0.0006

CRI: 96.1 CRI R9 Value: 98.0

CQS: 96.4

TLCI: 90

TM-30-18 Rf: 94.2


TM-30-18 Rg: 103.2

1st Dominant Wavelength: 631 nm

2nd Dominant Wavelength: 448 nm



Spectral Distribution

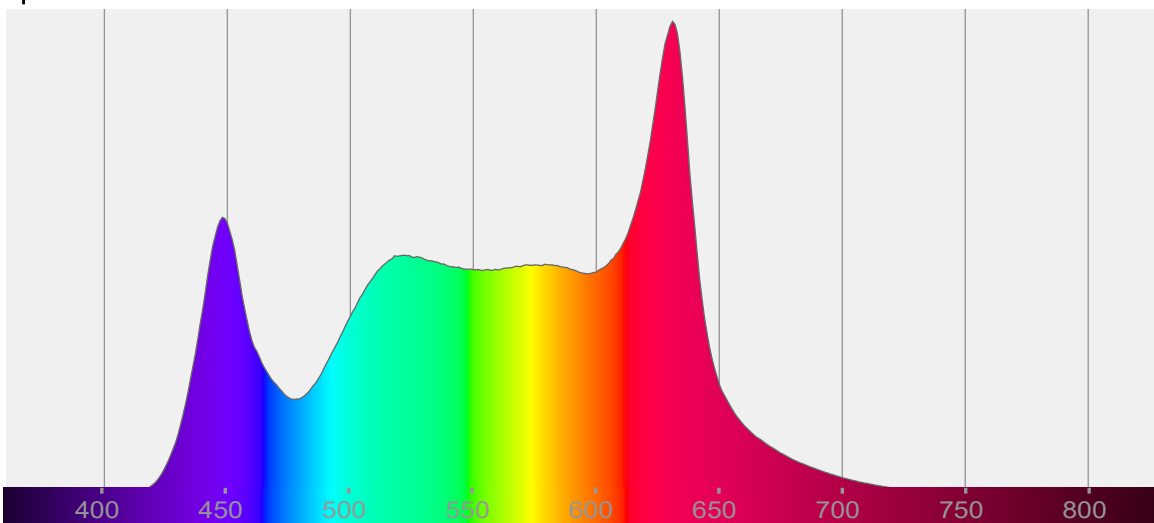

Tested Color

4053 K

CIE 1931 Coordinates:

X: 0.379 Y: 0.377

Color Temperature

4053 K

Light Quality

CRI: 96.1


Notes:

Chromaticity Report


Ovation Rêve E-3: 4000K - 26° Lens - Full Power

Chromaticity


CIE 1931

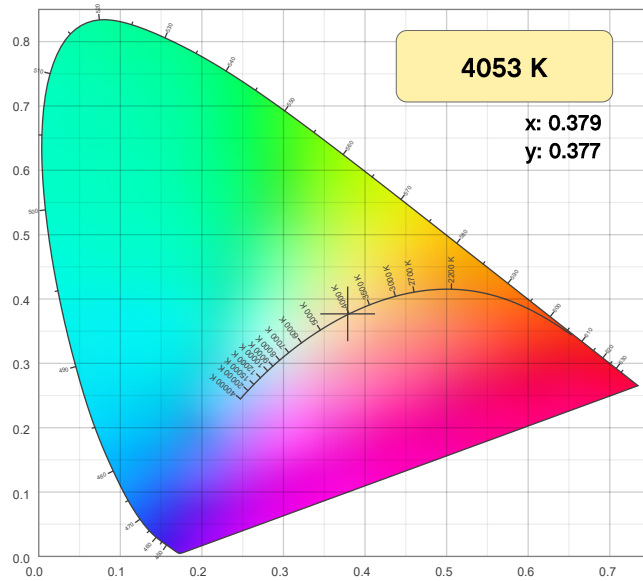


CIE 1931 - Zoom

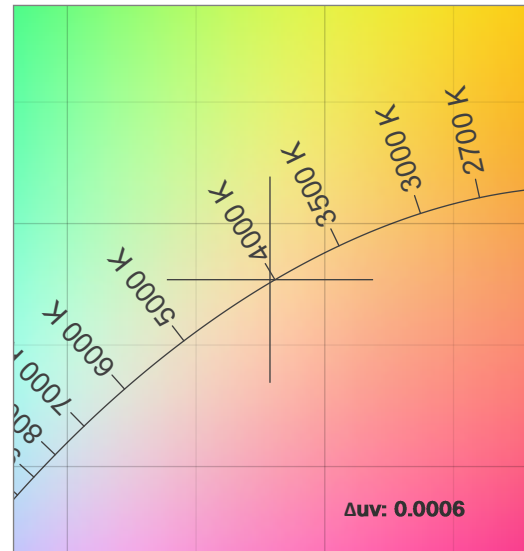

CRI: 96.1 (R1-R8)

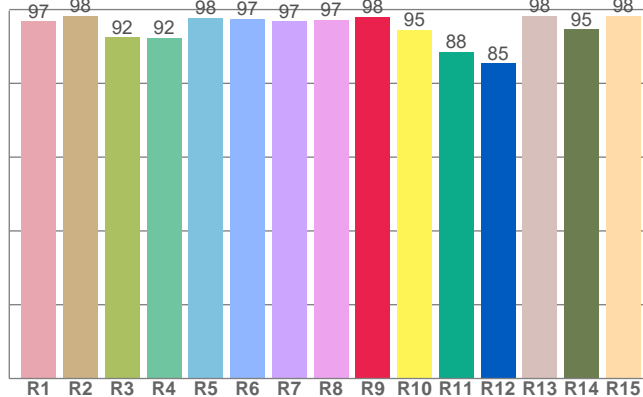

CQS: 96.4

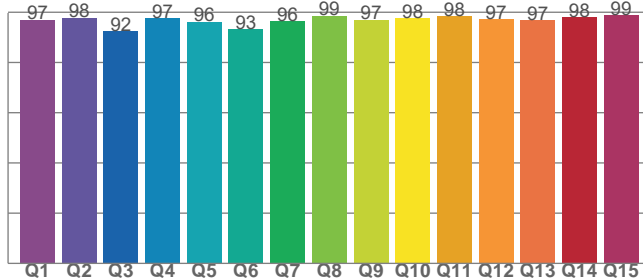

Color Parameters

Color Temperature	Color Coordinate CIE 1931	Color Coordinate CIE 1931
CCT	x	y
4053 K	0.379	0.377

Color Deviation from Black Body Curve	Color Coordinate CIE 1964	Color Coordinate CIE 1964
Δ_{uv}	y	u
0.0006	0.377	0.224

Color Rendering Index	Red Component	Color Quality Scale
CRI	CRI - R9	CQS
96.1	98.0	96.4

Television Lighting Consistency Index	Color Fidelity	Color Gamut
TLCI	TM-30-18 - Rf	TM-30-18 Rg
90	94.2	103.2

Chromaticity Report

Ovation Rêve E-3: 4000K - 26° Lens - Full Power

TM-30-18 Details


Rf 94.2

Fidelity Index
(R_f)

Rg 103.2

Gamut Index (R_g)


Color Vector Graphic




Color Distortion Graphic




Hue Bin	R _f	Chroma Shift	Hue Shift
1	95	-1%	-1%
2	97	1%	-1%
3	96	0%	1%
4	97	0%	1%
5	94	0%	2%
6	93	4%	3%
7	95	3%	1%
8	94	2%	0%
9	96	1%	0%
10	97	-1%	1%
11	92	3%	4%
12	90	4%	1%
13	91	4%	-5%
14	95	3%	2%
15	91	3%	-5%
16	90	3%	-6%

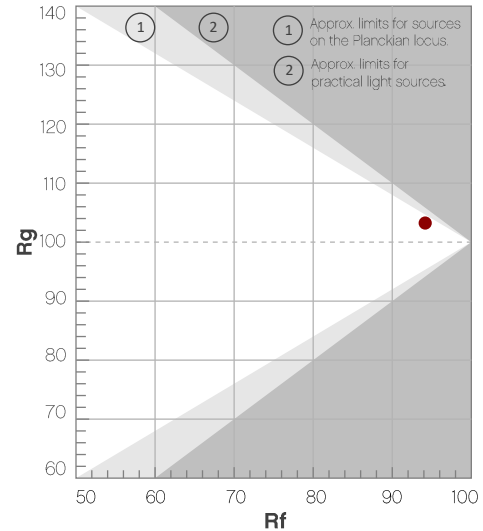


R_f by Hue Bin

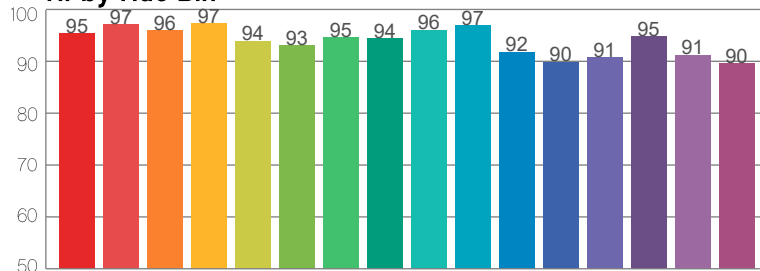

Local Chroma Shift by Hue Bin

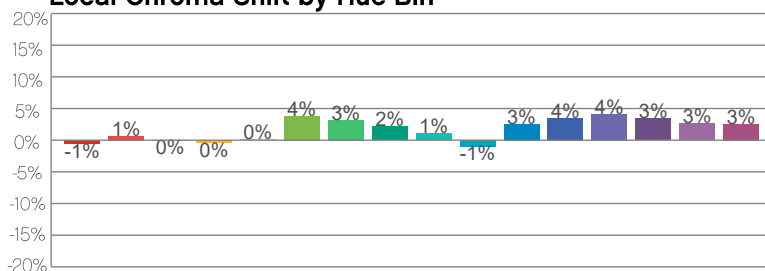

Color Sample Fidelity

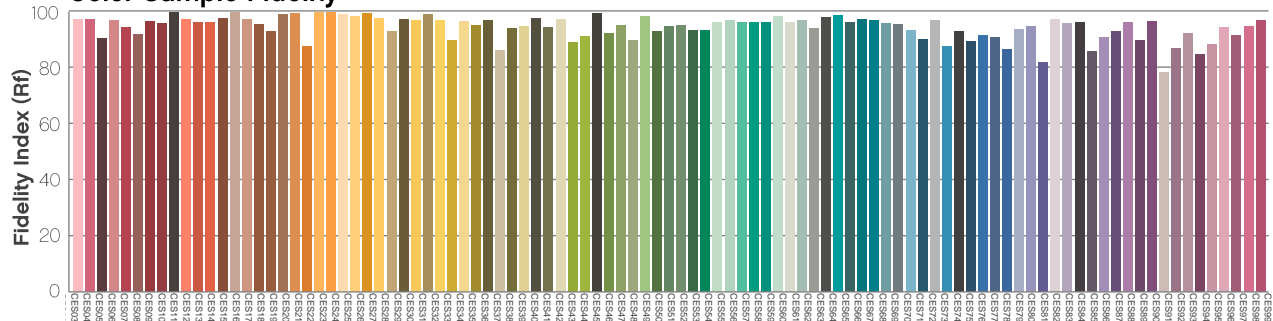

Chromaticity Report

Ovation Rêve E-3: 5600K - 26° Lens - Full Power

Report Summary

Measurements


Total Lumens: 13023 lm
Peak Intensity: 82696 cd
Fixture Efficacy: 36 lm/W

Correlated Color Temperature: 5657K
 Δuv : -0.0040

CRI: 94.4 CRI R9 Value: 95.2
CQS: 94.0
TLCI: 91
TM-30-18 Rf: 92.1
TM-30-18 Rg: 104.6
1st Dominant Wavelength: 448 nm
2nd Dominant Wavelength: 630 nm



Spectral Distribution

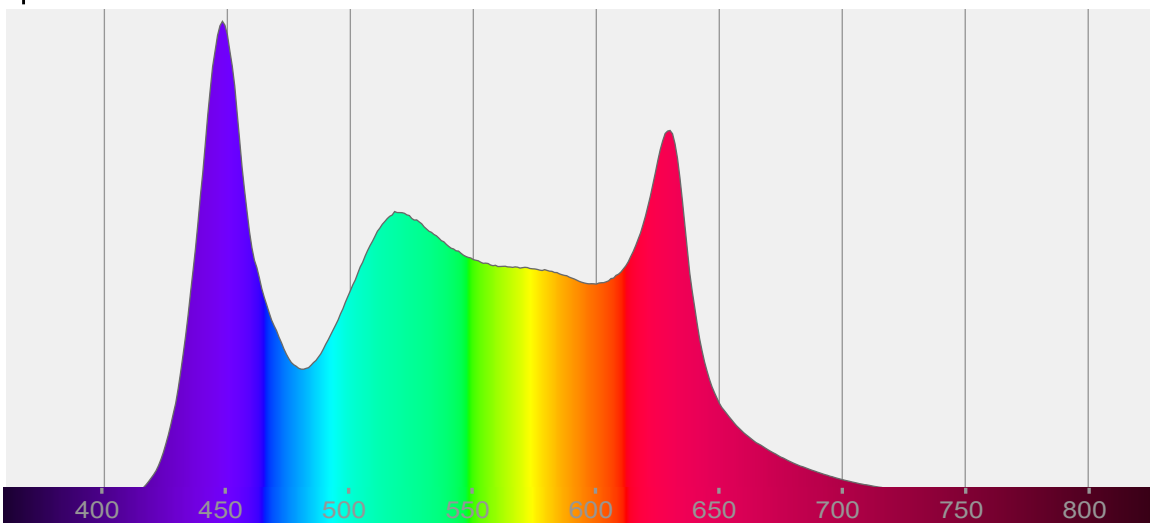

Tested Color

5657 K

CIE 1931 Coordinates:
X: 0.329 Y: 0.337

Color Temperature

5657 K

Light Quality

CRI: 94.4


Notes:

Chromaticity Report


Ovation Rêve E-3: 5600K - 26° Lens - Full Power

Chromaticity


CIE 1931

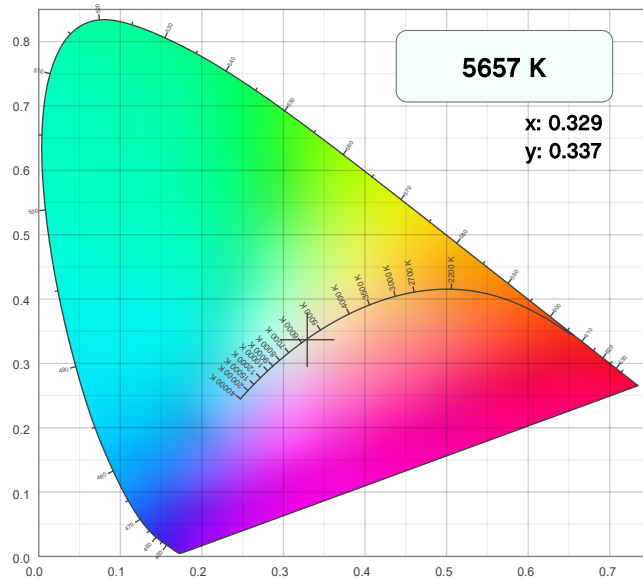


CIE 1931 - Zoom

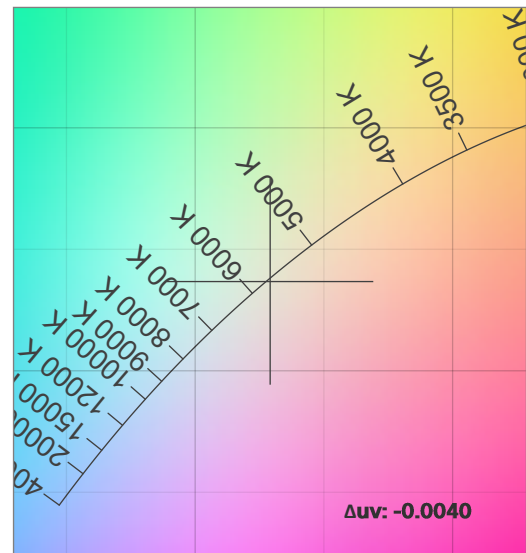

CRI: 94.4 (R1-R8)

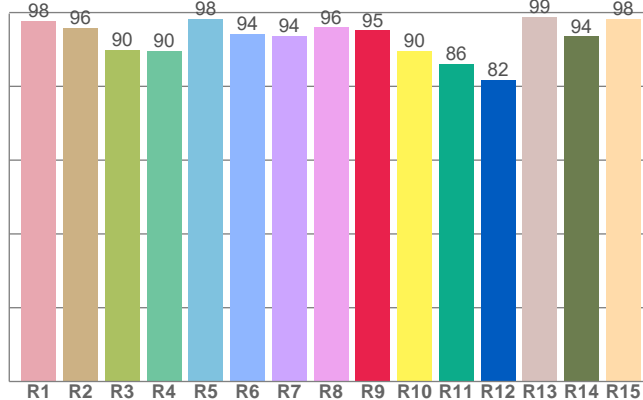

CQS: 94.0

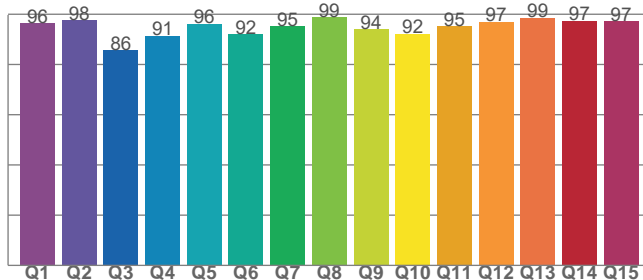

Color Parameters

Color Temperature	Color Coordinate CIE 1931	Color Coordinate CIE 1931
CCT	x	y
5657 K	0.329	0.337

Color Deviation from Black Body Curve	Color Coordinate CIE 1964	Color Coordinate CIE 1964
Δuv	y	u
-0.0040	0.337	0.206

Color Rendering Index	Red Component	Color Quality Scale
CRI	CRI - R9	CQS
94.4	95.2	94.0

Television Lighting Consistency Index	Color Fidelity	Color Gamut
TLCI	TM-30-18 - Rf	TM-30-18 Rg
91	92.1	104.6

Chromaticity Report

Ovation Rêve E-3: 5600K - 26° Lens - Full Power

TM-30-18 Details


Rf 92.1

Fidelity Index
(R_f)

Rg 104.6

Gamut Index (R_g)


Color Vector Graphic




Color Distortion Graphic




Hue Bin	R _f	Chroma Shift	Hue Shift
1	94	-1%	-1%
2	98	0%	1%
3	93	0%	4%
4	93	1%	4%
5	90	2%	4%
6	91	6%	3%
7	93	4%	0%
8	95	1%	-1%
9	96	-1%	1%
10	93	-2%	4%
11	85	2%	9%
12	92	3%	4%
13	92	6%	0%
14	90	5%	1%
15	86	9%	-8%
16	94	2%	-2%

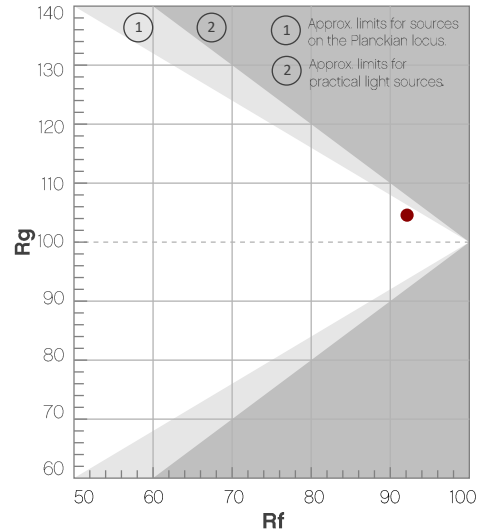


R_f by Hue Bin

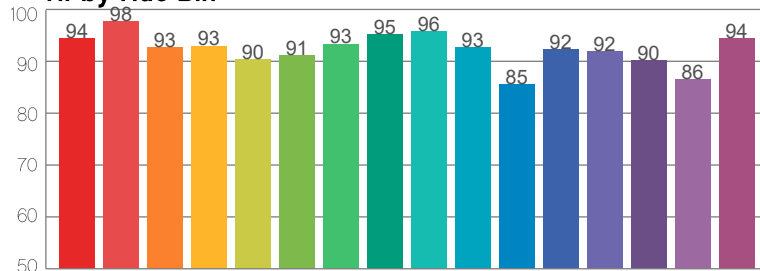

Local Chroma Shift by Hue Bin

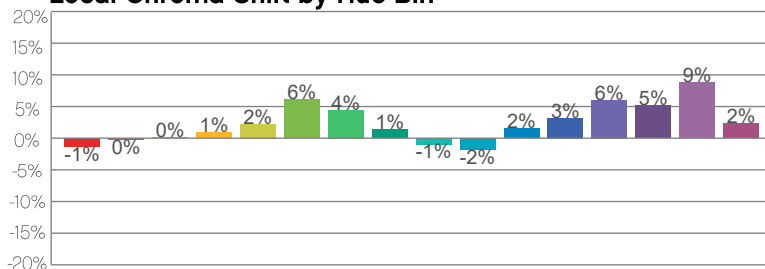

Color Sample Fidelity

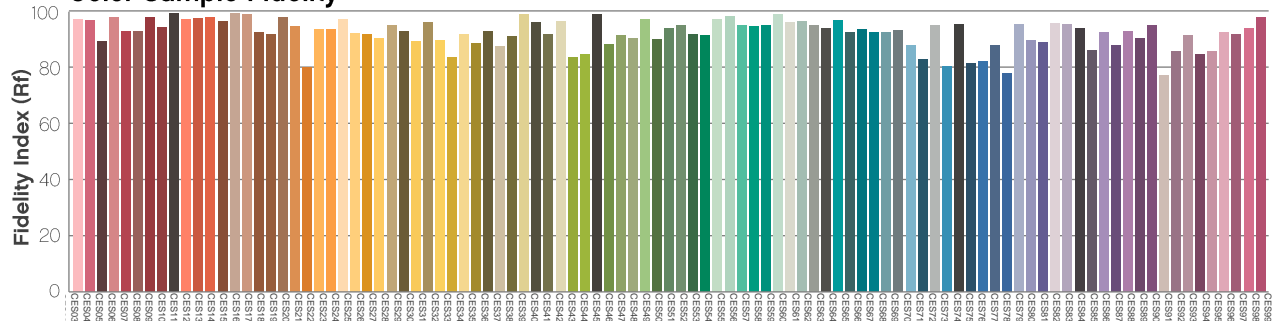

Contact Us

General Information	Technical Support
Chauvet World Headquarters	
5200 NW 108 th Ave. Sunrise, FL 33351 Voice: (954) 577-4455 Fax: (954) 929-5560 Toll Free: (800) 762-1084	Voice: (844) 393-7575 Fax: (954) 756-8015 Email: chauvetcs@chauvetlighting.com Website: www.chauvetprofessional.com
Chauvet Europe Ltd	
Unit 1C Brookhill Road Industrial Estate Pinxton, Nottingham, UK NG16 6NT Voice: +44 (0) 1773 511115 Fax: +44 (0) 1773 511110	Email: UKtech@chauvetlighting.eu Website: www.chauvetprofessional.eu
Chauvet Europe BVBA	
Stokstraat 18 9770 Kruishoutem, Belgium Voice: +32 (9) 388 93 97	Email: BNLtech@chauvetlighting.eu Website: www.chauvetprofessional.eu
Chauvet France	
3, Rue Ampère 91380 Chilly-Mazarin, France Voice: +33 1 78 85 33 59	Email: FRtech@chauvetlighting.fr Website: www.chauvetprofessional.eu
Chauvet Germany	
Bruno-Bürgel-Str. 11 28759 Bremen, Germany Voice: +49 421 62 60 20	Email: DEtech@chauvetlighting.de Website: www.chauvetprofessional.eu
Chauvet Mexico	
Av. de las Partidas 34 - 3B (Entrance by Calle 2) Zona Industrial Lerma Lerma, Edo. de México, CP 52000 Voice: +52 (728) 690-2010	Email: servicio@chauvetlighting.de Website: www.chauvetprofessional.eu

Visit the applicable website above to verify our contact information and instructions to request support. Outside the U.S., U.K., Ireland, Benelux, France, Germany, or Mexico, contact the dealer of the record.